

SOW THE WIND


Toxic Air Pollution from the Savannah River Site



March 2007

An Investigative Report
by the
Blue Ridge Environmental Defense League

For they have sown the wind, and they shall reap the whirlwind [Hosea 8:7]

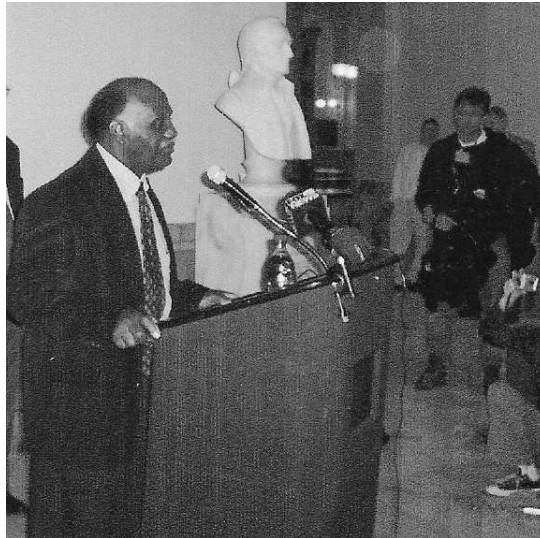

Charles Utley, Blue Ridge Environmental Defense League
Research Project Staff

Blue Ridge Environmental Defense League

PO Box 88 Glendale Springs, North Carolina 28629

(336) 982-2691 BREDL@skybest.com

<http://www.BREDL.org>

This research project and report were supported by a grant from the
Citizen's Monitoring and Technical Assessment Fund

History of MTA Fund

As part of a 1998 court settlement between U.S. Department of Energy (DOE) and 39 plaintiffs (nonprofit peace and environmental groups around the country), DOE established a \$6.25 million Citizens' Monitoring and Technical Assessment Fund (MTA Fund) to provide money to non-profit, non-governmental organizations and Federally recognized tribal governments working on issues related to the nuclear weapons complex. The Fund was established to help those groups procure technical and scientific assistance to perform technical and scientific reviews and analyses of environmental management activities at DOE sites. These grants may also support dissemination of the technical and scientific reviews and analyses undertaken with monies from the MTA Fund, but cannot be used for litigation, lobbying, general administrative support, or fundraising. The Fund represents an opportunity for citizens groups, tribes, and others to conduct their own research and monitoring of DOE environmental management activities at sites throughout the country. The Fund also represents an opportunity to develop new approaches for community-based research that may be applicable to other environmental issues and problems.

The cover shows the Defense Waste Processing Facility at the Savannah River Site. DWPF treats high-level radioactive waste by mixing it with borosilicate glass and heating it to 2,100 degrees-F to form a ceramic which is stored in stainless steel canisters. Photo courtesy of Department of Energy Savannah River Office.

Table of Contents

List of Figures	Page 3
List of Tables	Page 4
References	Page 5-6
Executive Summary Recommendations	Page 7
Early History	Page 8
How the Major Bomb Plant Units Worked Nuclear Reactors Reactor Materials: 300-M Area F and H Chemical Separations Areas D Area Waste Management Areas Accidental Releases	Page 9
The Legacy of Radioactive Waste	Page 12
SRS Pollution Continues After Bomb Plants Close Water Pollution Air Pollution	Page 15
Our Findings Ambient Air Modeling Radionuclides Detected Outside SRS Pollutants Detected By Sampling Air Outside SRS Ambient Levels Traced to SRS Processes	Page 23
A Turning Point?	Page 30
Conclusion	Page 31
A Vision for the Future	Page 31
Appendix A: Air Modeling Protocol	
Appendix B: SCREEN3 Model Data	
Appendix C: EPA Air Sampling Quality Assurance Memo	
Annotated Bibliography of Sources	

List of Figures

Figure A.	Production Process at SRS	page 9
Figure B.	SRS Land Use Map	page 16
Figure C.	Map of SRS With Air Sample Test Sites	page 26
Figure D.	Annual Wind Rose Diagram for SRS	page 28
Figure E.	Annual Wind Speeds	page 29

List of Tables

Table 1. Ground-water contamination at the Savannah River Site	page 12
Table 2. 1996 DOE Baseline Environmental Management Report	page 14
Table 3. Radioactive Liquid Releases	page 17
Table 4. DOE Waste Acceptance Criteria	page 17
Table 5. Annual Airborne Radionuclide Emissions	page 19
Table 6. Annual Emissions of Toxic Air Pollutants	page 20
Table 7. Criteria Air Pollutant Annual Emissions	page 21
Table 8. Criteria Pollutants in Permit Application	page 22
Table 9. Hazardous Air Pollutants in Permit Application	page 22-23
Table 10 SRS Property Line Pollutants	page 24
Table 11: Jackson Pollutants	page 24
Table 12: Williston Pollutants	page 24
Table 13: New Ellenton Pollutants	page 24
Table 14: Aiken Pollutants	page 24
Table 15, Grab Sample Dates, Times, Vicinity	page 26
Table 16. Actual Ambient Concentrations	page 27
Table 17. Tentatively Identified Compounds	page 27

References

- a) *The Savannah River Site Dose Reconstruction Project Phase II: Source Term Calculation and Ingestion Pathway Data Retrieval*, Risk Assessment Corporation, Report No. 1-CDC-SRS-1999-Final, April 30, 2001
- b) Process flow summary diagram of the SRS, Savannah River Site Environmental Dose Reconstruction Project, Phase II: Source Term Calculation and Ingestion Pathway Data Retrieval Evaluation of Materials Released from the Savannah River Site, April 30, 2001, RAC Report No. 1-CDC-SRS-1999-Final, Figure 2-2
- c) *Savannah River Site End State Vision Document*, July 26, 2005, p. 50, 63, 65, 73
- d) *Savannah River Site End State Vision Document*, July 26, 2005, p. 56
- e) *D-Area Preliminary Hazards Analysis*, Paik IR, April 1998, WSRC-TR-98-00102, Rev. 1
- f) *D-Area Drip Irrigation-Phytoremediation Project: SRTC Final Report*, Wilde EW et al, January 2003, WSRC-TR-2002-00080
- g) *Savannah River Site End State Vision Document*, July 26, 2005, p. 52
- h) *Savannah River Site Environmental Dose Reconstruction Project, Phase II: Source Term Calculation and Ingestion Pathway Data Retrieval Evaluation of Materials Released from the Savannah River Site*, April 30, 2001, RAC Report No. 1-CDC-SRS-1999-Final, p. 4.1-28
- i) *Savannah River Site Environmental Dose Reconstruction Project, Phase II: Source Term Calculation and Ingestion Pathway Data Retrieval Evaluation of Materials Released from the Savannah River Site*, April 30, 2001, RAC Report No. 1-CDC-SRS-1999-Final, p. 4.1-27
- j) *Ground-Water Flow Study in the Vicinity of the Savannah River Site, South Carolina and Georgia*, John S. Clarke, U.S. Geological Survey, Fact Sheet FS-178-95, August 1995,
http://ga.water.usgs.gov/publications/fs178_95/fs178_95.html
- k) Basis for Section 3116 Determination for Salt Waste Disposal at the Savannah River Site, DOE-WD-2005-001, February 28, 2005
- l) *Interim Salt Processing Strategy Planning Baseline*, Revision 0, Mahoney, MJ and d'Entremont PD, CBU-PED-2004-00027, August 27, 2004, Basis for Section 3116 Determination for Salt Waste Disposal at the Savannah River Site, DOE-WD-2005-001, February 28, 2005, page 9
- m) *1996 Baseline Environmental Management Report* at <http://web.em.doe.gov/bemr96/scarol.html>
- n) DOE Savannah River Operations Office BEMR Posted 08/19/1996 at <http://web.em.doe.gov/bemr96/sars2.html>
- o) *Environmental Radiation Surveillance Report 2000-2002*, Georgia Department of Natural Resources Environmental Protection Division, , Published March 2004
- p) *Land Use Control Assurance Plan for the SRS*, WSRC-RP-98-4125, Updated January 12, 2002 Revision.1.1, Page 3
- q) Westinghouse Savannah River Company Annual Reports, 2003, 2004, 2005
- r) South Carolina Stewardship Program, Appx E

- s) *Danger Lurks Below: The Threat to Major Water Supplies from US Department of Energy Nuclear Weapons Plants*, April 2004, Alliance for Nuclear Accountability, Page 105
- t) *Groundwater Levels, Predevelopment Groundwater Flow, and Stream Aquifer Relations in the Vicinity of the Savannah River Site, Georgia and South Carolina*, Clarke JS and West TW, US Geological Survey Water Resources Investigations Report 97-4197, Page 104
- u) WSRC-TR-2003-00130, Revision 1, Page 8
- v) SRS Environmental Bulletin, Vol. 17, No. 9, 5/17/06
- w) Environmental Report for 2005, WSRC-TR-2006-00007
- x) *Executive Summary*, SRS Health Effects Subcommittee, Centers for Disease Control and Prevention, Dept of Health and Human Services, 25 August 2004
- y) *Ten-Year History of SRS Annual Atmospheric Tritium Releases*, Environmental Report for 2003 (WSRC-TR-2004-00015), Figure 3-1, page 21
- z) Draft Section 3116 Determination, Salt Waste Disposal, SRS, DOE-WD-2005-001
- aa) Environmental Report for 2003, WSRC-TR-2004-00015
- bb) Environmental Report for 2004, WSRC-TR-2005-00005
- cc) *Ten-Year History of SRS Annual Atmospheric Tritium Releases*, Environmental Report for 2003 (WSRC-TR-2004-00015), page 25
- dd) *Georgia Environmental Radiation Surveillance Report 2000 – 2002*, Section D
- ee) *Under A Cloud*, Norm Buske, The Radioactivist Campaign, October 2003
- ff) Columbia Analytical Services, 2665 Park Center Drive, Simi Valley, California, CDHS No. 2380, AIHA Lab No. 101661
- gg) City Data for Aiken, South Carolina June 2006 downloaded at <http://www.city-data.com/city/Aiken-South-Carolina.html>
- hh) *Determination of Uranium and Mercury Speciation in High Level Waste Tank 8F and 11H Sludge*, Duff MC et al, 9/24/01, WSRC-TR-2001-00428, Rev. 0
- ii) *Mixed Oxide Fuel Fabrication Facility Environmental Report, Rev 1 & 2*, Figure 4-13, U. S. Department of Energy Contract DE-AC02-99-CH10888
- jj) *Long-Term Institutional Management of US DOE Legacy Waste Sites*, National Research Council of the National Academy of Science, August 2000

SOW THE WIND

Toxic Air Pollution from the Savannah River Site

Executive Summary

In the early 1950's, the United States constructed a vast new atomic weapons center in the rolling countryside between Aiken, South Carolina and Augusta, Georgia. Factories replaced farmland and whole towns were relocated to make way for a huge federal facility.

Today, nuclear weapons production has taken a back seat to environmental clean up at the Savannah River Site, SRS. The 310 square mile SRS encompasses scores of underground tanks with millions of gallons of radioactive sludge, waste dumps with thousands of tons of contaminated soil and huge amounts of polluted groundwater. Radioactive gas is being dispersed into the air. Facilities for high-level and low-level waste continue to process and store radioactive substances.

In 2001 the Blue Ridge Environmental Defense League launched an extensive investigation into the operations at the Savannah River Site. We gathered reports prepared by government contractors. We studied the surrounding communities. Using computer modeling, we calculated the impact of air pollution from SRS in nearby towns. In addition to air modeling, we collected air samples at various points around the perimeter of the site. We detected a variety of toxic air pollutants outside the boundaries. The atmospheric emissions from SRS include tritium, nitric acid, volatile organic compounds, mercury, hydrogen fluoride, styrene and many other pollutants.

Our principal conclusion based on the findings of this report is that recent and ongoing operations at SRS are having and may continue to have negative impacts on the health of residents in the central Savannah River area unless sweeping changes are made. Our investigation centered on the atmospheric emissions from smokestacks at SRS and how they affect nearby towns and rural communities. We know that the consequences of contamination have had an impact on people in all directions for hundreds of square miles around SRS. Additional exposure must be reduced and eliminated. Finally, we hold that the additional burdens which would be created by new military production facilities at SRS would be an injustice to the people in this area. Based upon the findings in this report, we make the following recommendations.

We must:

Alert people to the ongoing hazards and half-hearted cleanup under way at SRS. The 50-year remediation program envisioned by the Department of Energy in the 1990's was a more accurate assessment of the task at hand than the current plans of half that duration.

Take whatever steps are necessary to halt the spread of toxic and radioactive pollution of the soil, water and air. The clean up project must be comprehensive and should not trade one type of pollution for another.

Prevent the development and manufacture of new atomic weapons. We must talk about the environmental damages and negative health impacts that would result from a renewed reliance on SRS as a weapons plant. We must question the conventional wisdom that says nuclear deterrence must be maintained, that national security is based on weapons of mass destruction, and that weapons plants are essential to our economy.

Transform SRS into a regional center for clean, renewable energy development. There is excellent potential for wind-powered electric generation off the coast of South Carolina and Georgia that is not visible from scenic beaches. The South Carolina Energy Office says the state spent more than \$10 billion for energy last year - 98 percent was imported. Much could be accomplished if just one-tenth of that sum were diverted to in-state energy resources. Let us complete the environmental cleanup of bomb factories and convert SRS to the development and implementation of clean, alternative energy technologies.

Early History

In 1950 the Atomic Energy Commission designated the location for the atomic weapons complex which was then called the Savannah River Plant. Within five years, the basic facilities were in operation and plutonium metal and tritium gas were being produced and delivered for atomic weapons. The principal construction and operations contractor was E. I. du Pont de Nemours and Company which continued as such until Westinghouse took the reins in 1989. Until the end of the Cold War in 1991, nuclear materials for tens of thousands of atomic weapons were manufactured at the Savannah River Plant. The United States produced half the plutonium and most of the tritium in the U.S. nuclear arsenal here.

The purpose of the Savannah River Plant was nuclear materials production and chemical separation of radionuclides. The facilities at SRS included five heavy water nuclear reactors, a nuclear fuel and target fabrication plant, and two chemical plants which separated plutonium-239 and tritium from the irradiated nuclear fuel. Nuclear fuel and targets were irradiated in the reactors, then removed and dissolved in acid. The useful radionuclides, isotopes of uranium and plutonium, were extracted, leaving large amounts of radioactive and hazardous wastes. Between 1953 and 1988 SRS produced approximately 39 tons of plutonium-239 and large volumes of tritium. The principal industrial operations at the Savannah River Plant were:

- fabricating atomic fuel
- extracting and purifying heavy water
- creating plutonium and tritium in atomic reactors
- purifying plutonium and tritium for weapons

The Savannah River Plant had six major operational areas: 1) nuclear production

reactors (five designated 100-R, -P, -L, -K and -C), 2) two chemical separations plants located in F-Area and H-Area, called “canyons” because of their shape, 3) tritium production facilities, 4) nuclear fuel and target fabrication plants (M-Area), 5) heavy water production (D-Area), and 6) multiple waste areas including seepage basins for liquids, waste pits and piles for solids, tanks for high-level radioactive wastes (F and H Areas), and landfills for low-level radioactive wastes. Figure A illustrates the production process.

The key processes leading to tritium releases at the SRS included: nuclear reactor operations, recovery of fission products in the separations facilities, recovery of tritium in the tritium facilities, laboratory research processes and the heavy water rework facility. [a]

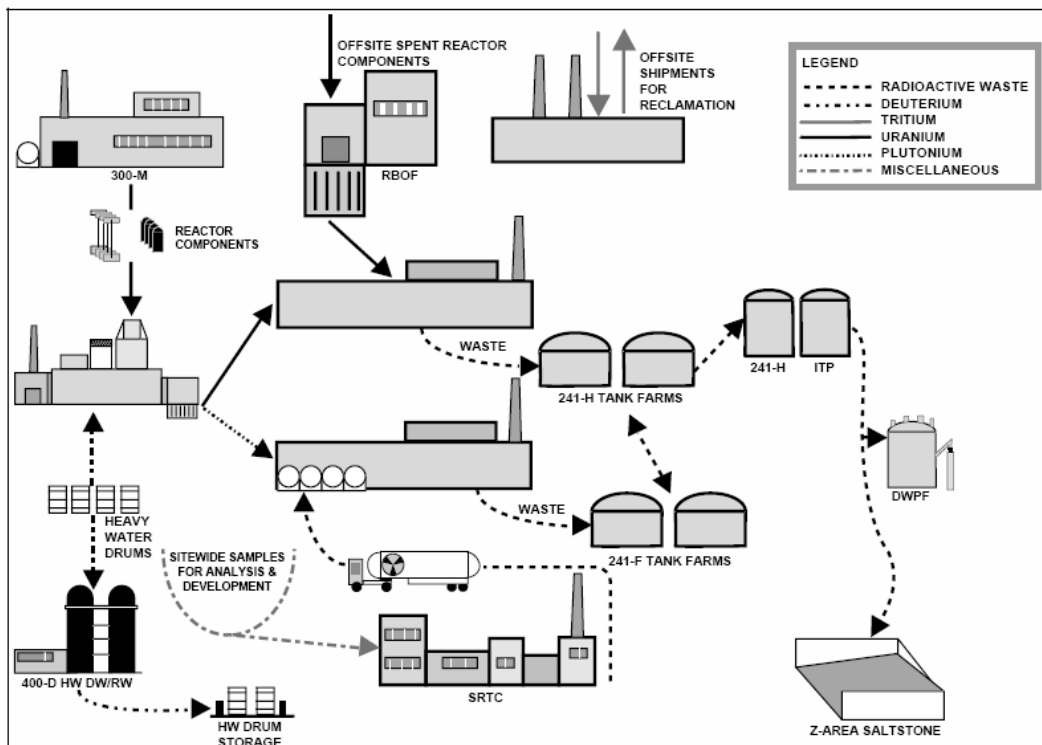


Figure A. Production Process at SRS [b]

How the Major Bomb Plant Units Worked

Nuclear Reactors

Five nuclear reactors operated at the SRS in K-Area, L-Area, P-Area, C-Area, and R-Area. Plutonium and tritium were created in these reactors using uranium and lithium absorption of neutrons. The nuclear fission reactions were moderated with heavy-water which was circulated through heat exchangers to cool the reactors. Heavy water moderates by slowing neutrons thereby increasing amount of fission. Although large

amounts of energy were produced, it was an unwanted by-product which was discarded as heat to the Savannah River and two onsite lakes. [a]

Today the five reactors are shut down but some are used for storage: plutonium and highly enriched uranium (HEU) in K-Area, heavy water in C-Area, spent nuclear fuel (SNF) in L-Area and depleted uranium (DU) in R-Area. [c]

Reactor Materials: 300-M Area

M Area was the site for manufacturing nuclear fuel, control rods and nuclear target elements for use in SRS production reactors. Additional products were manufactured for military and research use and space satellites.

Since 1952, it is estimated that M-Area has used about 13 million pounds of chlorinated solvents to degrease the reactor components produced in the facility (Christensen and Brendell 1981). Much of this solvent material was disposed onsite, and it remains as underground contaminants. Chapter 15 discusses these materials in detail. [a]

The groundwater and soil in M-Area remains heavily contaminated by solvents.

F and H Chemical Separations Areas

Nuclear materials produced in the reactors were transferred to F and H Areas for processing. These areas housed the sole nuclear chemical processing units for US military production. Today, F-Area is closed; H-Area remains operable. [d] The two chemical factories were similar. Each had two process lines which extracted uranium, plutonium, and other fission products. Other facilities in F-Area and H-Area processed the plutonium and uranium into solid form. Liquid fission products were stored in high level radioactive waste (HLW) tank farms in F and H areas. [a] Today, the tank farms hold about 36 million gallons of highly radioactive waste: a mixture of liquified salts and sludges. Also, the Receiving Basin for Offsite Fuel (RBOF) still stores nuclear fuel brought in from other locations. In addition top storage tanks F-Tank Farm and H-Tank Farm contained two evaporator systems. [d]

D Area

From 1953 to 1998 SRS operated a series of heavy water facilities which were located in D-Area —the Rework Unit, the DuPont Water Plant, the Moderator Processing Facility and the Technical Purification Facility. Their principal function was to extract deuterium from river water for use in SRS atomic reactors and to distill tritium from the irradiated water. D-Area also stored water and waste materials. Some tritium was lost to the air and to liquid effluents by evaporation of moderator leaks and carry over of tritium oxide on fuel and target elements during reactor discharge. [a] In 1998 the amount of Tritium waste was estimated to be as high as 16,000 Curies. Plutonium-239 in heavy water at D-Area was estimated by WSRC to be 15.9 grams. Excess levels of potassium permanganate (KMnO₄) were also present. [e]

Today groundwater in D-Area is contaminated 30 to 50 feet deep with solvents trichloroethylene, perchloroethylene and cis-dichloroethylene. A large plume with more than 100 parts per billion of TCE is moving towards the Savannah River. [f] Current operations include a coal-fired power plant operated by South Carolina Electric & Gas Company. [g]

Waste Management Areas

SRS operations generated hazardous, radioactive, and mixed radioactive and hazardous wastes. Disposal methods included seepage basins for liquids and burial pits for solid radioactive wastes.

Records indicate that there are over 150 waste sites of which 20 were used for radioactive materials. Fifteen sites were used for mixed hazardous and radioactive wastes (Christensen and Gordon 1983; Looney et al. 1986). [a]

Accidental Releases

Between 1951 and 1989, many accidents occurred at the Savannah River Plant; some involved the melting of reactor fuel while others took place at the chemical separations plants. Many incidents resulted in widespread radiation releases to the atmosphere. [h] The Risk Assessment Corporation's report to the Centers for Disease Control gives us an idea of the magnitude of the contamination:

The search profile for the TAFFDSRS (TAFFTDSRS 1994) [Tritium Area Facilities Fault Tree Data Storage and Retrieval System] produced a printout listing 2994 incidents for just the five different curie levels (1 to 100 Ci; 100 to 1000 Ci; 1000 to 10,000 Ci; 10,000 to 100,000 Ci; and greater than 100,000 Ci). ... Another list of approximately 3000 incidents was printed out under the remainder of the tritium search. ... Incidents of tritium releases over 700 Ci were used as the basis for documenting inadvertent releases for this report. [i]

Large amounts of tritium was released in its elemental gaseous form (HT) and in the form of water vapor (HTO):

A list of "Inadvertent Tritium Releases to the Environment from SRS Operations," found among C. Zeigler's personal files, notes three specific cases of atmospheric releases from reactors: (1) November to December 1961 (20,000 Ci HTO) from P-reactor stack, (2) March to June 1977 (83,000 Ci HTO) from C-reactor, and (3) early in 1978 (62,810 Ci HTO) from C-Reactor stack (Zeigler 1994). [i]

With the end of the Cold War in 1991, nuclear weapons materials production at SRS ended and, except for a brief re-start of the K-Reactor in 1992, the atomic reactors were mothballed.

The Legacy of Radioactive Waste

In the 1980's SRS began environmental restoration activities and the Savannah River Site was placed on the National Priority List, the Superfund. The Department of Energy created the division of Environmental Management in 1989 to handle the environmental damages of weapons production. A separate DOE Office of Future Liabilities was established to manage sites where ongoing projects are located.

Contamination at SRS includes the radionuclides strontium-90, cesium-137, cobalt-60, and tritium; toxic solvents trichloroethylene and tetrachloroethylene; and heavy metals arsenic, cadmium, chromium, mercury, and lead. In addition, 262 radioactive and hazardous waste dumps used for liquids, solids, and ash have these poisons plus thorium, uranium, plutonium-238, and plutonium-239. Trenches in the sand hold 16 million cubic feet of solid low-level radioactive waste, and hundreds of thousands of cubic feet of transuranic waste are stored in temporary facilities.

Much of the radioactive waste at SRS was evaporated, but large amounts remain in the tank farms, seepage basins, and waste pits at SRS. Originally, SRS had 2,800 buildings clustered on 10% of the site. Many of these have been dismantled. The principal facilities remaining include five closed nuclear reactors, two chemical plants, a heavy water plant, a nuclear target plant, a tritium extraction plant, and numerous waste facilities.

Since being put on the Superfund list, the principal activity at SRS has been cleaning up or slowing the spread of soil and water contamination left by decades of industrial weapons manufacturing. Table 1 shows groundwater pollution published in a study done by the US Geological Survey in 1995:

Table 1. Ground-water contamination at the Savannah River Site [j]

Area	Pollutants
A and M	Chlorinated volatile organics, radionuclides, metals, nitrate
C, K, L, and P	tritium, other radionuclides, metals, chlorinated volatile organics
D	metals, radionuclides, sulfate, chlorinated volatile organics
R	radionuclides, cadmium
Sanitary landfill	Chlorinated volatile organics, radionuclides, metals
Separations and waste-management areas	tritium, other radionuclides, metals, nitrate, chlorinated volatile organics, sulfate
TNX	Chlorinated volatile organics, radionuclides, pesticides, nitrate

By far the largest amount of radioactivity is stored in rusting underground tanks in the F-Area and H-Area tank farms. For decades waste from the F-Area and H-Area canyons

was flushed into 51 steel tanks ranging in size from 0.75 million to 1.3 million gallons capacity each. The Department of Energy reports that:

Since it became operational in 1951, SRS has produced nuclear material for national defense, research, medical, and space programs resulting in the generation of large quantities of radioactive waste which are currently stored onsite in 49 underground carbon steel waste storage tanks (SRS has a total of 51 underground waste storage tanks). [k]

Since 1951 SRS has generated over 140 million gallons of highly radioactive liquid waste laced with a mixture of salts, acids, metals and solvents. [l] Total potential volume of all the tanks combined was about 58 million gallons, but through the use of evaporators, 104 million gallons of this liquid waste was emitted into the air. Today 36.4 million gallons of liquid and solid wastes are stored in the SRS tank farm. DOE states:

During the evaporation process, the salt waste is concentrated and forms two distinct phases –concentrated supernate solution and solid saltcake (collectively called salt waste). The solid saltcake is composed predominantly of nitrate, carbonate, aluminate, and sulfate salts and contains relatively small quantities of radioactive material. Because of the relative high solubility of cesium (Cs), the predominant radionuclide present in salt waste, 95% [Ledbetter, L. S., CBU-PIT-2004-00024, “12/01/04 – December Monthly WCS Curie and Volume Inventory Report,” Revision 0, December 9, 2004] of the Cs-137 in the salt waste is found in the concentrated supernate solution. As the result of the evaporation process, over 140 Mgal of liquid waste originally received have been reduced to the present volume of 36 Mgal [Ledbetter, L. S., CBU-PIT-2004-00024, “12/01/04 – December Monthly WCS Curie and Volume Inventory Report,” Revision 0, December 9, 2004.]. Evaporator operations have been extremely effective in minimizing waste volume stored in SRS waste tanks, but because the majority of the waste has been fully concentrated using the available SRS equipment, significant further reductions via evaporation of the total waste volume stored are not possible. [k]

Four of the 51 original high-level radioactive waste tanks have been emptied and two of those have been closed. Of the remaining 47 tanks, thirteen have leaked. The 27 newer Type III style tanks are in use; the remaining 20 old-style tanks lack secondary containment and await disposition. DOE states:

In 1997, following approval of closure modules by the State of South Carolina, DOE operationally closed Tanks 17 and 20. On June 30, 2000, the NRC issued to DOE its final Technical Evaluation Report concerning those tanks. [k]

Today, these tanks hold over half the nation’s weapons-related high-level radioactive waste: 430 million Curies. This waste is a mixture of liquid and sludge containing long-lived radioactive isotopes, hazardous chemicals, and toxic heavy metals. Of this total, 45% of the radioactivity, 223 million curies, and 93% of the volume, 33.8 million gallons, is in the form of salt waste containing a mixture of Cesium-137 and Strontium-90 and other dangerous radionuclides. DOE states:

Prior to transfer of the waste material from the F- and H-Canyons, chemicals (sodium hydroxide) are added to adjust the waste to an alkaline state to prevent corrosion of the carbon steel waste tanks. This chemical adjustment results in the precipitation of metals including strontium (Sr) and actinides (e.g., plutonium (Pu)). These solids settle to the bottom of the waste tanks forming a layer that is commonly referred to as sludge. After settling of the solids has occurred, the salt solution (supernate) above this sludge layer is decanted off. In order to maximize the space available in the tanks for storing additional waste, DOE's practice at SRS has been to use the Tank Farm evaporator systems to reduce the volume of the decanted supernate and concentrate the waste. [k]

In 1996 DOE issued a Baseline Environmental Management Report which catalogued the massive cleanup necessary for the nation's defense sites. The Savannah River Operations Office Environmental Restoration Program published baseline information on polluted areas which estimated that SRS had over 1,000 facilities which were potentially contaminated with hazardous and radioactive materials. These areas posed major risks to public health because of continued migration of pollutants which had already contaminated groundwater at SRS. The hazardous pollutants identified included trichloroethylene, tetrachloroethylene, arsenic, cadmium, chromium, lithium, mercury, and lead. Radioactive pollutants included strontium-90, cesium-137, cobalt-60, enriched uranium, plutonium-238, plutonium-239 and tritium. The BEMR projected a massive cleanup operation lasting through mid-century. [m] Table 2 provides a summary of the BEMR cost projections through 2065.

Table 2. 1996 DOE Baseline Environmental Management Report [m]

<i>(Thousands of Current Year Dollars)</i>								
	FY 1996	1997	1998	1999	2000			
Savannah River Site	1,389,419	1,231,205	1,413,940	1,471,840	1,564,508	<i>Grey shaded area reflects annual cost estimates for the first five years of the site BEMR Base Case (as of October 1995) and includes 3% annual inflation, see Readers' Guide.</i>		
State-wide 1996 Appropriation	1,259,161			<i>These levels reflect the current estimates for compliance with applicable statutes and agreements (as of March 1996), see Readers' Guide.</i>				
State-wide 1997 Congressional Request		1,152,346						
<i>(Five-Year Averages, Thousands of Constant 1996 Dollars)</i>								
	FY 1996-2000	2005	2010	2015	2020	2025	2030	
Savannah River Site	1,330,905	1,305,762	1,208,301	1,317,708	1,376,731	1,218,920	1,011,915	
	FY 2035	2040	2045	2050	2055	2060	2065	Life Cycle*
Savannah River Site	621,022	322,875	39,623	62				48,769,120

* Total Life Cycle is the sum of the annual costs in constant FY 1996 dollars.

The methods employed by DOE in the remediation of surface soils and groundwater at SRS include soil cover, in situ bioremediation, grout, thermal desorbition, excavation, vacuum extraction and air strippers. The total cost of Savannah River Site characterization, remediation, maintenance, deactivation and disposition from 1996 through 2050 was estimated to exceed \$48 billion. [m] The estimated remediation of the

nine principal waste areas alone was projected to last through 2045 at a cost of \$12.6 billion. [n]

The Federal Facility Agreement of August 16, 1993 listed the affected facilities, detailed the required actions and set deadlines. Applicable federal laws include the National Environmental Policy Act, the Clean Water Act, the Clean Air Act, the Toxic Substances Control Act and the Comprehensive Environmental Response, Compensation, and Liability Act. Also, certain state laws apply including the South Carolina Pollution Control Act, South Carolina Storm-Water Management and Erosion Control Regulations, and South Carolina Solid Waste Regulations. However, the federal clean up effort was short-circuited when tax cuts and budget cutbacks prompted DOE to create the Accelerated Cleanup program. The new plan was supposed to save time and money by removing some of the high-level radioactive waste stored in the F-Area and H-Area Tank Farms, pour a concrete “grout” over the remainder, and abandon them. The DOE’s “accelerated” plan defied expert opinion and was contrary to the law. So, DOE convinced Congress to approve Section 3116 of the 2005 National Defense Authorization Act which declared that high-level radioactive waste resulting from re-processing would now be designated “incidental” waste and that above ground storage or burial in a deep repository is no longer required. This provision applies only to waste in South Carolina and Idaho. The very same waste in any other state will still be designated high-level radioactive waste and will have to be sent to a deep geologic repository.

SRS Pollution Continues After Bomb Plants Close

The Savannah River Site is one of the most contaminated radioactive sites on earth. In 1991, weapons manufacturing ended for the most part, but other activities at SRS continue to pollute the air and water. State surveillance of radiation levels anticipate continued emissions of radioactive pollutants from the Savannah River Site:

Although the reactors at SRS are no longer operating, millions of gallons of highly radioactive liquid waste and thousands of spent fuel elements still pose a significant, long-term environmental risk, which require continued monitoring. Future missions at SRS, including the disassembly and re-processing of plutonium pits and the recovery and recycling of excess plutonium and uranium for mixed-oxide reactor fuel, will also require continued vigilance for many years, due to the long-lived nature of the processed material and possible releases from accidents or reprocessing operations. Another significant mission, which is currently underway, is the production of replacement tritium (H-3), which will be processed and extracted at SRS in the near future. This will likely result in increased airborne H-3 releases to the off-site environment starting around the end of 2004. [o]

SOW THE WIND explores the ongoing pollution of the soil, groundwater, surface water and air at the Savannah River Site.

The land use map in Figure B indicates the principal nuclear and non-nuclear industrial areas and their location in SRS watersheds.

Figure B: SRS Land Use Map [p]

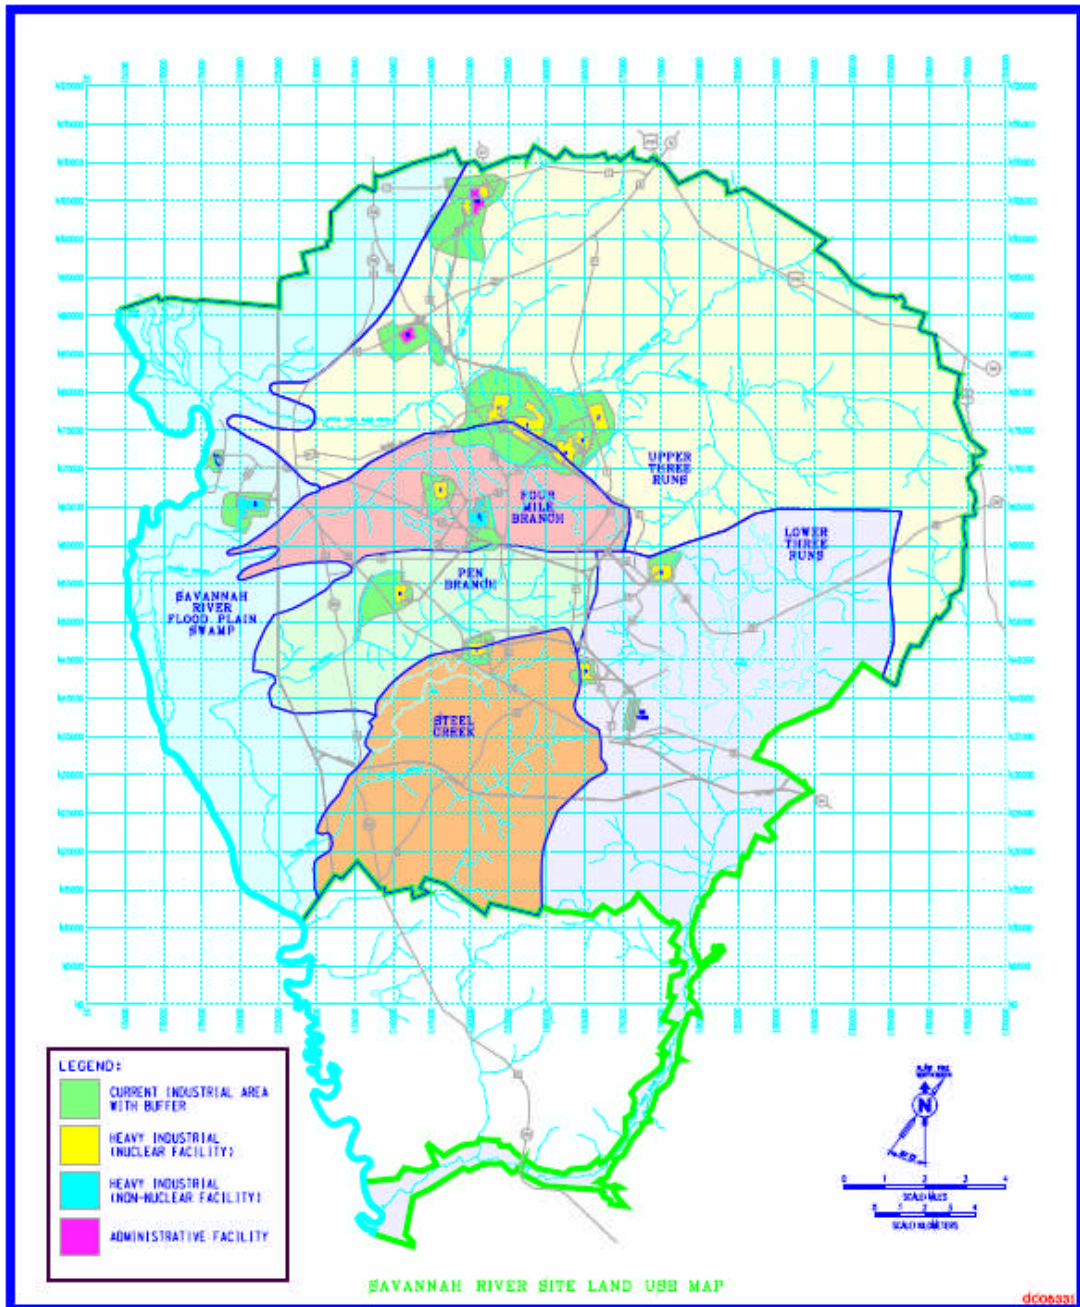


Figure 1 - SRS Land Use Map

Water Pollution

Contamination of the tributaries and aquifers near the Savannah River Site is fairly well documented. There are upwards of one thousand locations at the Savannah River Site contaminated with radioactive and hazardous substances. Total radioactive releases from SRS to surface and ground water during the last three years are shown in Table 3.

Table 3. Radioactive Liquid Releases

Calendar Year	Curies
2003	4320
2004	2680
2005	2510

By far the greatest amount of radioactive liquid released was Tritium. Other water-borne radionuclides which together contributed less than 1% of the activity included Cesium-137, Iodine-129, Strontium-90, Technetium-99, Uranium-234/235/238, Plutonium-238/239, Americium-241 and Curium-244. [q]

SRS occupies 17 miles of riverbank on the Savannah River and is drained by five streams: Pen Branch, Steel Creek, Four Mile Branch, Upper Three Runs and Lower Three Runs. According to the DOE, SRS has 600 billion gallons of contaminated groundwater underlying about 8,300 acres (4% of the total 198,366 acres). [r] The threat to underground aquifers is great. According to an independent report, "The Savannah River Site is located within the greatest water recharge area on the southeastern seaboard." [s] Moreover, the contamination may not be limited to the South Carolina side of the river. The US geological Survey made extensive studies of the Central Savannah River Area and found that underground water flows into Georgia:

"Flow lines on potentiometric-surface maps of the confined Dublin and Midville aquifer systems suggest possible occurrence [sic] of lateral trans-river flow for a short distance into Georgia prior to discharge into the Savannah River alluvial valley." [t]

The Savannah River Site has a solid waste system plan which allows the continued dumping of low-level radioactive waste. SRS E-Area, a 200-acre facility, permits Engineered Trenches and Slit Trenches for the disposal of so-called low-level radioactive waste. Table 4 lists the DOE's Waste Acceptance Criteria for allowable levels of four radionuclides.

Table 4. DOE Waste Acceptance Criteria

Radionuclide	Slit (Ci/ft ³)	Engineered (Ci/ft ³)
H-3	1.90E-05	1.20E-05
C-14	4.50E-05	2.90E-05
Tc-99	3.20E-06	1.00E-06
I-129	5.30E-09	1.70E-09

Westinghouse Savannah River Company reports that radionuclide content of “non-routine waste” must meet the following to be dumped in these trenches:

In addition to being non-hazardous and non-TRU, meeting the WAC package guidelines, sum of fractions criteria, and the fissile content criteria (see Sections 4.2.2 – 4.2.5), to avoid special handling, low-level waste must be in a package that has a dose rate less than 200 mrem/hr at contact (Reference 11). Although unlikely to be exceeded, this criterion is probably the one that will be limiting for the disposal of high-curie waste in a LAW container. If there is a possibility that this will be a problem, the high-activity waste should be placed in the center with lower-activity waste on the sides. [u]

A few years ago, the DOE decided that money could be saved by not burying all low-level radioactive waste in vaults. The waste disposal volume of low-level radioactive waste from decommissioning and demolition activities at SRS which has been buried on-site is 2,026,500 cubic feet. [v] Therefore, according to the WAC, 38.5 curies of Tritium, 91 curies of carbon-14, 6.5 curies of technetium-99 may have been added to the underground environment in SRS E-Area in an attempt to clean it up. The practice is ongoing.

Air Pollution

The amount of airborne radioactive pollution from SRS is massive. It is greater than the liquid releases to streams and groundwater by at least an order of magnitude. The relative impact to surrounding communities is less well understood because actual studies of air contaminants are relatively few in number. Also, there is no equivalent of the many municipal water agencies to catalog the quality of the air supply to local residents. Nevertheless, there are some emissions data for radioactive and toxic air pollutants. We have made use of the available information to provide a framework for our investigations.

Industrial facilities which emit air pollutants are regulated by the federal Clean Air Act and must conform to National Ambient Air Quality Standards (NAAQS). In South Carolina, additional regulations are enforced by the SC Department of Health and Environmental Control under Regulation 61-62, Air Pollution Control Regulations and Standards (Sections 48-1-10 *et seq.* of the 1976 South Carolina Code of Laws).

SRS has over 5,000 air emission sources but conducts no surveillance of on-site non-radiological air quality. Instead, SRS utilizes air dispersion modeling to determine compliance with state and federal air pollution regulations [w].

The WSRC Environmental Report issued annually details the radionuclide emissions from SRS, including atmospheric releases. The two basic categories of radionuclide air pollution are gases/vapors—Hydrogen-3, Carbon-14 Krypton-85 and Iodine-129/131—and particulates—Cesium-137, Technetium-99, Uranium-238, etc. Table 5 lists the gaseous and vaporous emissions since the closure of major weapons manufacturing activities.

Table 5. Annual Airborne Radionuclide Emissions (Gases and vapors)

YEAR	Total Curies	H3 (Ci)
1992 ^a		156,000
1993 ^a		191,000
1994 ^a		160,000
1995 ^a		97,000
1996 ^a		55,300
1997 ^a		58,000
1998 ^a	99,700	82,700
1999 ^a		51,600
2000 ^a		44,800
2001 ^b	112,100	47,400
2002 ^b	78,800	47,300
2003 ^b	113,800	50,800
2004 ^b	61,300	61,300
2005 ^b	40,800	40,800
Total		1,144,000

a. Environmental Report for 2001, WSRC-TR-2001-00474

b. Environmental Report for 2005, WSRC-TR-2006-00007

Emissions of radionuclides include primarily H-3, C-14, K-85, and I-129/131/133. Additional radionuclide particulate emissions include Cs-137, Sr-89/90, Pu-241, and Tc-99. Hydrogen-3 (tritium) is typically the major radionuclide quantity emitted and is also considered to have the principal impact on human health.

According to the Centers for Disease Control SRS Health Effect Subcommittee, the radionuclides of concern during air releases are Iodine-131, Hydrogen-3 (tritium) and Argon-141; the most important pathways of ingestion for airborne contamination are through the eating of beef and milk. [x]

Changes in plant operations cause occasional fluctuations in emissions; for example, from 2001 to 2003 krypton-85 emissions were greatly increased: Westinghouse Savannah River Company's 2003 report states:

Because of increased operations in H-Canyon, the amount of krypton-85 estimated to have been released by the site increased from 31,500 Ci in 2002 to 63,000 in 2003. Krypton-85 accounted for about 56 percent of the total radioactivity released to the atmosphere from SRS operations.

Tritium in elemental and oxide forms accounted for 44 percent of the total radioactivity released to the atmosphere from SRS operations. During 2003, about 50,000 Ci of tritium were released from SRS, compared to about 47,300 Ci in 2002. Because of improvements in facilities, processes, and operations, and because of changes in the site's missions, the amount of tritium (and other atmospheric radionuclides) released generally has declined during the past 15 years at SRS. In recent years, because of changes in the site's missions and the existence of the Replacement Tritium Facility, the total amount of tritium

released has fluctuated but has remained less than 100,000 Ci per year. [y]

According to the Department of Energy's proposed salt waste processing plan, at least 3 million curies of waste is to be stored indefinitely at the Saltstone Disposal Facility at SRS. [z] The plan encompasses the processing of the current waste volume via both the Interim Salt Process, to take place within this decade, and the higher-capacity Salt Waste Process, to commence in 2009. An additional 41.3 million gallons of salt waste would be generated at the SRS Defense Waste Processing Facility by 2020. This waste is to be stored in the F-Area and H-Area Tank Farms and sent to the Salt Waste Processing Facility. The processing of salt wastes involves the evaporation of water and volatile liquids from the high-level nuclear waste tanks. The DOE's salt waste plan includes the emission of 32.2 million gallons of radioactive liquid waste to the air over the next 15 years. [z]

Toxic air pollutants are non-radioactive compounds which are noxious, poisonous or carcinogenic. They include a variety of chlorinated compounds, heavy metals and reduced sulfur gases. Table 6 lists the toxic emissions reported by Westinghouse Savannah River Company in 2002, 2003 and 2004.

Table 6. Annual Emissions of Toxic Air Pollutants (Pounds) (n/d = no data)

Pollutant	2002 [aa]	2003 [bb]	2004 [w]
Acetaldehyde	538	268	10,580
Benzene	9,720	1,798	5,980
1,3 Butadiene	149	74	3,000
Carbon disulfide	3	9	328
Carbon tetrachloride	14	144	12,320
Chloroform	5,040	23,000	3,080
Chromium	<1	<1	3,700
Formaldehyde	1,336	742	24,400
Hexane	1,494	1,502	4,840
Hydrochloric acid	568	442	3,340
Hydrogen sulfide	12,100	12,420	n/d
Methanol	1,766	2,120	1,974
Methylene chloride	1,800	1,790	109,600
Nickel	132	137	2,560
Nitric acid	14,100	12,100	39,400
Ozone	n/d	n/d	10,160
Phosphoric acid	199	7,420	61
Sodium hydroxide	2,540	2,540	2,860
Styrene	5	4	4
Tetrachloroethylene	31,400	21,200	1,110,000
Toluene	8,420	8,260	15,780
1,1,1 Trichloroethane	22,000	19,300	9,880
Trichloroethylene (TCE)	11,840	9,300	312,000
Xylene	6,220	5,860	5,480

Emission monitors on smoke stacks are widely used to determine whether a source of pollution is operating in compliance with the law. However, SRS lacks comprehensive pollution monitoring. Westinghouse states:

SRS has several sources of toxic air pollutants; however, there are no specific monitoring requirements in their respective permits. Because some toxic air pollutants also are regulated as VOCs [volatile organic compounds], some SRS sources (soil vapor extraction units and air strippers) are required to be monitored by calculating and reporting VOC emissions on a quarterly basis.

Compliance by all SRS permitted sources is determined during annual compliance inspections by the local SCDHEC district air manager. The inspections consist of a review of each permit condition, i.e., daily monitoring readings, equipment calibrations, control device inspections, etc.

Compliance by all toxic air pollutant and criteria pollutant sources also is determined by using U.S. Environmental Protection Agency (EPA)-approved air dispersion models. The Industrial Source Complex Version No. 3 model was used to predict maximum ground-level concentrations occurring at or beyond the site boundary for new sources permitted in 2003. [cc]

A category of large volume air pollutants listed in the federal Clean Air Act as “criteria pollutants” are typically emitted by the burning of fossil fuels: coal, oil and gas. Table 7 lists these pollutants emitted annually from SRS as reported by WSRC:

Table 7. Criteria Air Pollutant Annual Emissions (pounds)

Air Pollutant	2002 [aa]	2003 [bb]	2004 [w]
Sulfur dioxide	1,116,000	1,072,000	4,300,000
Total suspended particulates	430,000	604,000	964,000
PM10	197,200	236,000	378,000
Carbon monoxide	2,440,000	4,580,000	1,964,000
Volatile organic compounds	159,800	186,600	1,088,000
Nitrogen dioxide	612,000	532,000	8,480,000
Lead	694	1,116	316
Hydrogen fluoride	252	228	278

This is a large amount of air pollution which has negative effects on air quality in the region. Table 8 (page 22) lists criteria air pollutants totals as they were reported by WSRC in their Title V air permit application to the South Carolina Department of Health and Environmental Control.

Criteria pollutant data are lower than the annual report totals, indicating that the emission totals compiled for the DHEC permit application underestimated the actual emission levels.

The hazardous air pollutants totals listed in Table 9 (page 22-23) were reported by WSRC in their Title V permit application to the South Carolina Department of Health and Environmental Control.

Table 8. Criteria Pollutants in Permit Application

CRITERIA POLLUTANTS	Pounds/year
Carbon monoxide	97,740
nitrogen oxides	528,590
sulfur oxides	621,778
volatile organic compounds (VOC)	145,146
particulates, total	35,013
PM-10	29,123
FACILITY-WIDE CRITERIA POLLUTANTS	1,428,267

Table 9. Hazardous Air Pollutants in Permit Application

HAZARDOUS AIR POLLUTANT	Pounds/year
Acetaldehyde	212.8
Acetonitrile	2.54
Acrolein	9.2
1,4 dioxane	2.54
Aniline	2.54
Antimony	0.07
Arsenic	6.59
Benzene	107470.8005
Beryllium	3.58
1,3 butadiene	59.2
Cadmium	13.43
Carbon tetrachloride	2.54
Chlorobenzene	2.6
chromium 6	79.44
Cresols	2.55
Chloroform	22.54
Cobalt	0.73
Cumene	1.4
2,4, dinitrotoluene	2.54
Diphenyl	0.001
ethyl benzene	12.4
Formaldehyde	1088.34
formic acid	2.54
Hexane	417.2
Hydrazine	2.54
hydrochloric acid	62912.94
hydrogen fluoride HF	128.16
Isopropanol	87
Lead	109.152
lead oxide	0.3
Manganese	22.48
manganese oxide	0.005
Mercury	602.33
Methanol	2.54
Methyl methacrylate	2.54
Methyl ethyl ketone	2.54
Methyl isobutyl ketone	2.54

Table 9 continued Hazardous Air Pollutants	Pounds/year
Naphthalene	8.12
Nickel	23.84
nitric acid	50818.5676
oxalic acid	2.54
n-paraffin	2316
Phenol	0.03
polycyclic organic matter	16.28
selenium dioxide	2.54
Selenium	0.74
sodium hydroxide	2.5404889
sulfuric acid	2.54
Styrene	0.32
Tetrachloroethane	2.54
1,1,2,2, tetrachloroethane	2.54
tetrachloroethylene (PCE)	3408
tri-butyl phosphate	53.61
1,1,1 trichloroethane	17.5
Trichloroethylene	2462.54
1,1,2 trichloro-1,2,2 trifluoroethane	1310
2,2,4 trimethylpentane	2.9
Toluene	172.76
vinyl chloride	2.54
Xylene	87.85
FACILITY-WIDE HAP	234010

The above hazardous air pollutant data are historical emissions and permitted pollution limits. But what are the impacts of these pollutants on the environment and public health? In order to determine this, one must rely on testing of the air, soil, water and living things.

Our Findings

Ambient Air Modeling

We calculated the impact on ambient air concentrations of air pollutants emitted from SRS in the nearby towns of Jackson, New Ellenton, Williston, Aiken and at the SRS property line. We based our computer modeling on Westinghouse Savannah River Company air permit application stack data, South Carolina DHEC emissions data, and SCREEN3 gaussian dispersion formulas. Appendix A details our methodology and formulas. Appendix B contains our modeling calculations.

The emissions of toxic air pollution from the exhaust stacks at SRS include nitrogen oxides (NO_x), nitric acid (HNO₃), volatile organic compounds (VOC), total suspended particulates (TSP), Sulfur oxides (SO_x), fine particulates (PM-10), mercury (Hg), hydrogen fluoride (HF) and many other pollutants.

The results of individual and combined pollutant levels indicate harmful levels of pollution outside the boundary of the SRS. The SCREEN3 results are compiled in Appendix B and are condensed in Tables 10 through 14.

Table 10 SRS Property Line

Cm	Facility	Distance (m)	Pollutants
458.6372226	F-SP0023	9388	NO _x , HNO ₃ , VOC, TSP, SO _x , PM-10
0.0001357	F-SP0256	9242	HNO ₃
20.9824962	H-SP0002	11523	NO _x , HNO ₃ , VOC, TSP, PM-10, Hg, Ni
0.4229316	H-TP0001	11393	TSP, PM-10, VOC, Ni
315.951165	K-PF0002	9036	TSP, SO _x , NO _x , CO, PM-10, VOC, Pb
85.0646	K-PF0003	9038	SO _x , NO _x , CO, PM-10, VOC
8.57049937	S-DP0007	10929	NO _x , CH ₂ O ₂ , HNO ₃ , SO _x , Hg, HF
889.6290505	Total		

Table 11: Jackson

Cm	Facility	Distance (m)	Pollutants
0.00000865	F-SP0256	11120	HNO ₃
2.46652209	K-PF0002	17680	TSP, SO _x , NO _x , CO, PM-10, VOC, Pb
0.65988696	K-PF0003	17680	SO _x , NO _x , CO, PM-10, VOC
1.69749	M-MP0411	4550	HCN
4.8239077	Total		

Table 12: Williston

Cm	Facility	Distance (m)	Pollutants
138.9198188	F-SP0023	27110	NO _x , HNO ₃ , VOC, TSP, SO _x , PM-10
0.00003706	F-SP0256	27250	HNO ₃
7.33038344	H-SP0002	24030	NO _x , HNO ₃ , VOC, TSP, PM-10, Hg, Ni
0.2359812	H-TP0001	24450	TSP, PM-10, VOC, Ni
146.4862204	Total	24360	

Table 13: New Ellenton

Cm	Facility	Distance (m)	Pollutants
0.00003567	F-SP0256	15550	HNO ₃
0.5107284	H-TP0001	15880	TSP, PM-10, VOC, Ni
16.42072304	H-SP0002	16090	NO _x , HNO ₃ , VOC, TSP, PM-10, Hg, Ni
0.67797	M-MP0411	10720	HCN
4.89201691	S-DP0007	12940	NO _x , CH ₂ O ₂ , HNO ₃ , SO _x , Hg, HF
22.50147402	Total		

Table 14: Aiken

Cm	Facility	Distance (m)	Pollutants
0.000001192	F-SP0256	30660	HNO ₃
4.17989588	H-SP0002	31090	NO _x , HNO ₃ , VOC, TSP, PM-10, Hg, Ni
0.1205568	H-TP0001	31000	TSP, PM-10, VOC, Ni
4.300453872	Total		

C_m = modeled pollutant concentration in micrograms per cubic meter (µg/m³)
 Pollutants are listed in descending order of ambient concentration

Radionuclides Detected Outside SRS

Pollution's impact on human health and the environment depends first and foremost on the actual levels of contamination found in the surrounding soil, water and air. These are known as ambient levels. Also, the measurement of pollution in fish, dairy products and wild game provides an assessment of the pollutant's impact caused by ingestion.

Between 2000 and 2002, the Georgia Environmental Protection Department found radioactive tritium, hydrogen-3, many times above background levels within a 400 square mile area around the SRS reservation. The agency concluded that most of this pollution was the result of airborne radionuclides. For example, milk had up to 3 times the tritium expected; air, soil and water pollution was detected up to 5 times above background level; and vegetation was found to contain as much as 13 times the background level.[dd]

In 2003 The Radioactivist Campaign found evidence of radioactive releases into the environment which may have contaminated nearby residential areas. TRAC found Cs-137 in soil samples downwind from SRS as high as 174 picocuries/kg and downstream from SRS in vegetation as high as 1254 pCi/kg. The latter contamination was six times the EPA drinking water maximum of 200 pCi/kg. [ee]

Pollutants Detected By Sampling of Air Outside SRS

In addition to air dispersion modeling, the Blue Ridge Environmental Defense League collected air samples at various points around the perimeter of SRS. We utilized the grab-sample technique and equipment developed by Communities for a Better Environment and Contra Costa (CA) Health Services and certified by the US EPA. Appendix C contains a 2001 US EPA Region 9 quality assurance memo on the program.

We detected a variety of toxic air pollutants outside the boundaries of SRS. League staff and volunteers gathered a series of samples at various locations around SRS in 2004 and 2005. We had the samples analyzed for volatile organic compounds and sulfur compounds at a certified air quality laboratory. [ff].

We had five grab-samples analyzed for twenty sulfur compounds per modified methods SCAQMD Method 307-91 and ATSM D 5504-01 using a gas chromatograph equipped with a sulfur chemiluminescence detector (SCD). All compounds with the exception of hydrogen sulfide and carbonyl sulfide were quantitated against the initial calibration curve for methyl mercaptan. Also, samples were analyzed for 45 Volatile Organic Compounds by combined gas chromatograph/mass spectrometry (GCMS) and for tentatively identified compounds utilizing a direct cryogenic trapping technique. The analyses were performed according to the methodology outlined in EPA Method TO-15 modified by the use of Tedlar sample bags.

Our sample collection dates and times are listed in Table 15. The sample numbers in Table 15 correspond to the map locations in Figure C (page 26).

Figure C. Map of SRS With Air Sample Test Sites

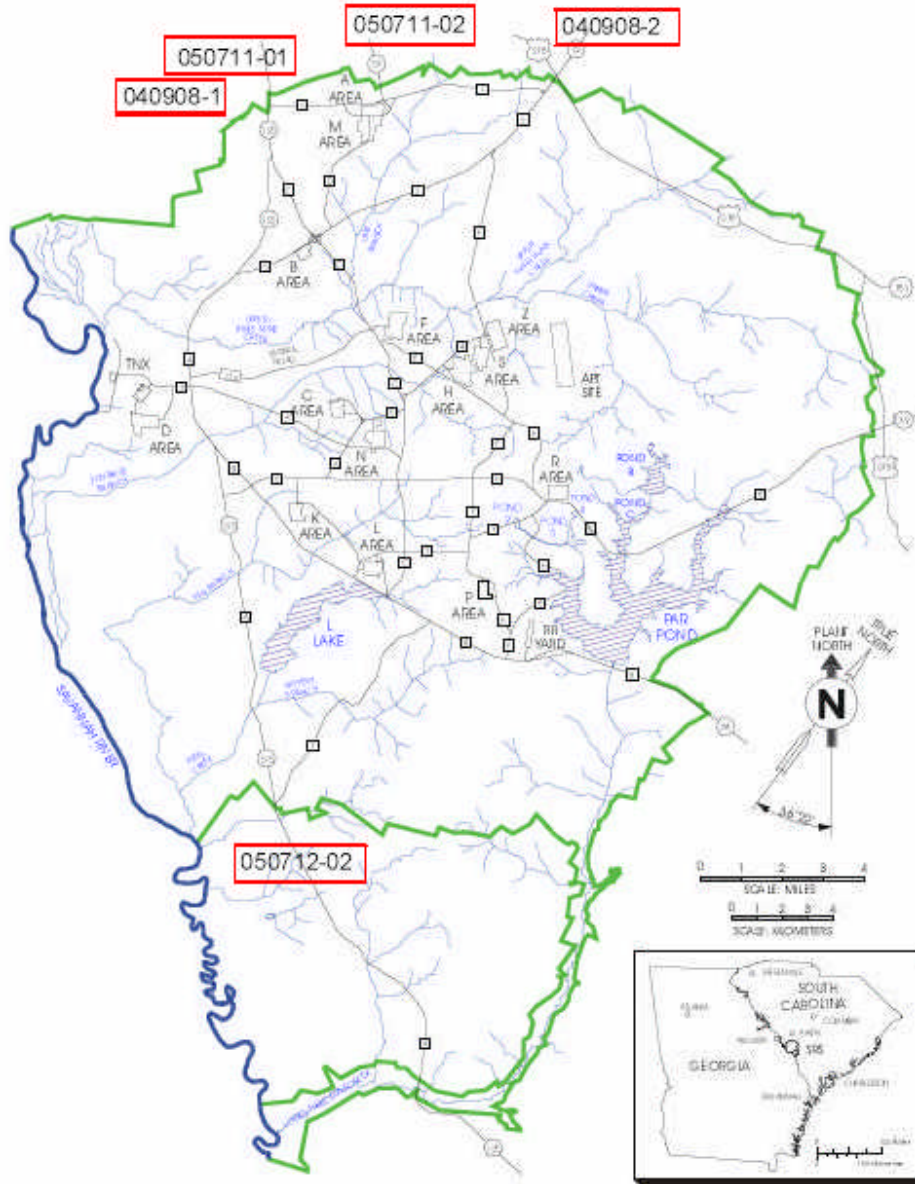


Table 15, Grab Sample Dates, Times, Vicinity

Sample # 040908-1	September 8, 2004	11:42 AM	Jackson
Sample # 040908-2	September 8, 2004	1:49 PM	New Ellenton
Sample # 050711-01	July 11, 2005	5:43 PM	Jackson
Sample # 050711-02	July 11, 2005	6:23 PM	SSR 57
Sample # 050712-02	July 12, 2005	9:42 AM	Hattiesville

These tests detected actual ambient levels of a variety of volatile organic and reduced sulfur compounds in the air near SRS. Our results are listed in Tables 16 and 17. All concentrations are in micrograms per cubic meter (μm^3).

Table 16. Actual Ambient Concentrations


Toxic air pollutant	μ / m^3
Sample # 040908-1	
Hydrogen sulfide	5.13
dimethyl disulfide	10.6
Toluene	8.8
Styrene	7
Sample # 040908-2	
Acetone	36
Sample # 050711-01	
Toluene	19
Styrene	5.5
Sample # 050711-02	
Carbon disulfide	8
Toluene	21
Sample # 050712-02	
carbon disulfide	6.1
Toluene	25

Table 17. Tentatively Identified Compounds (Estimated results)

Toxic air pollutant	μ / m^3
Sample # 040908-1	
2-Methylpentane	10
Isooctane	20
2,4-Dimethylheptane	20
Branched alkanes	10-20
n-Dodecane	30
Isothiocyanatocyclohexane	10
Sample # 050711-01	
Isoprene	50
2-methylpentane	10
C ₁₄ H ₃₀ alkane	20
Sample # 050711-02	
Isoprene	20
3-Methylpentane	20


Our grab-sample tests were typically carried out during light, steady wind conditions at points close to but outside of the perimeter of the Savannah River Site. Wind direction at time of each test was downwind from SRS. Reproduced below is a recent annual wind rose plot which records wind speed and direction in the SRS region.

Figure D. Annual Wind Rose Diagram for SRS [ii]

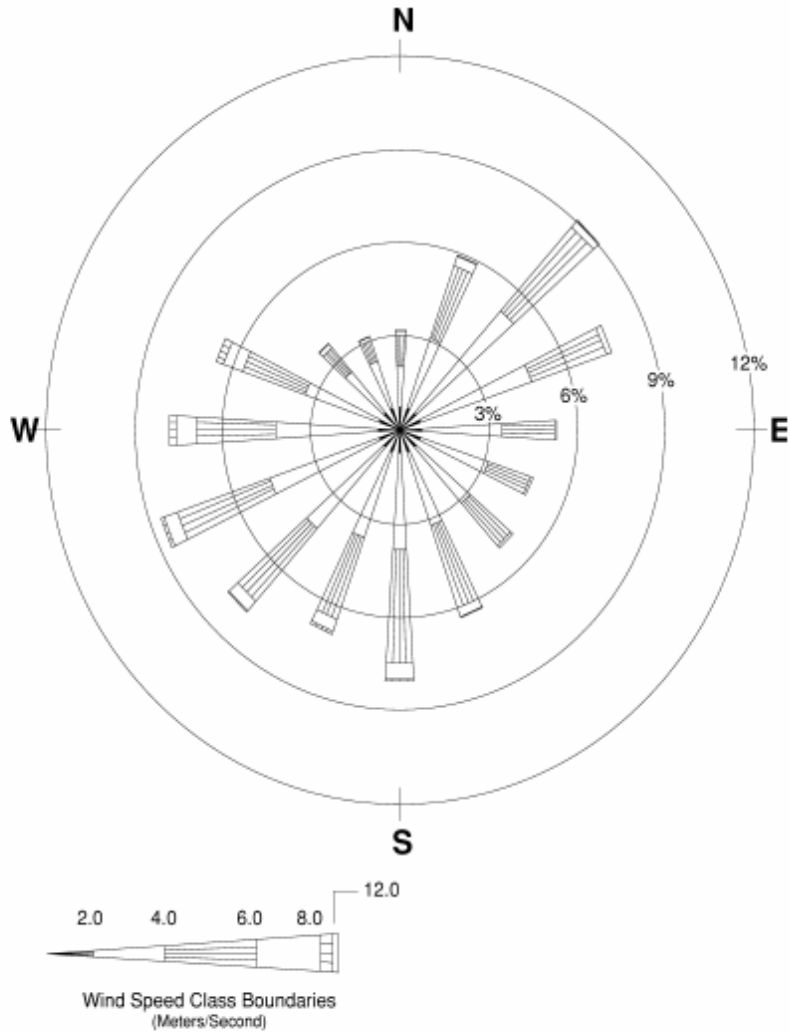

Source: SRS GSAR (WSRC 1999a)

Wind speed in the Aiken-Augusta area averages from 5 to 8 miles per hour, with the high occurring in early Spring and the low in late Summer. An annual wind-speed graph is shown in Figure E (page 29).

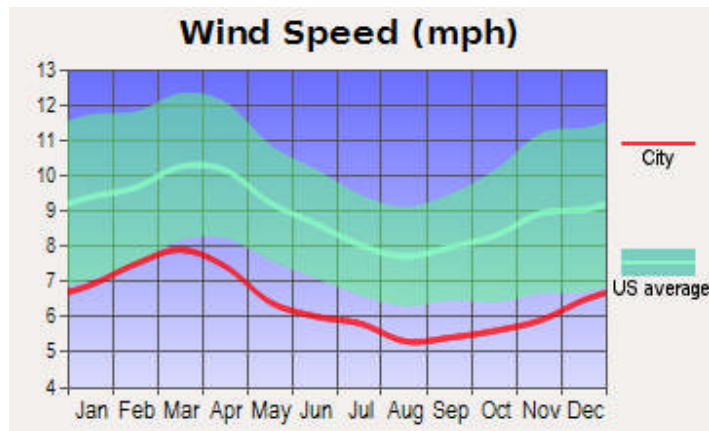Figure E. Annual Wind Speeds [gg]

The evidence of actual ambient levels of volatile organic compounds and reduced sulfur compounds detected in our tests and the computer modeling of stack emissions indicate that adverse levels of pollution are occurring in the communities surrounding the Savannah River Site. This suggests potentially negative public health impacts may be caused by ongoing operations at SRS.

Ambient Levels Traced to SRS Processes

Our air testing program detected styrene in the atmosphere near Jackson, SC (air test results listed in Table 16 above). Our technical experts indicated that styrene would likely have come from polymerization operations. We identified a possible source: the analysis of radioactive sludge which involves the use of polystyrene.

Tests for metals and radionuclides in waste tank sludge utilize X-ray absorption fine-structure (XAFS) techniques. To meet requirements set by the Brookhaven National Laboratory, sludge from SRS is embedded in polystyrene resin for transport. In this process polystyrene resin is heated and poured over the sludge samples. Then tests for mercury, uranium, strontium, cesium, plutonium and other metals are performed. WSRC described the process:

Testing required the preparation of 20-mg quantities of HLW sludge from Tanks 8F and 11H. ... Sludge 8F was dried in an oven at 100 degrees-C prior to use because it was in slurry form. ... Once dried, the sludge samples were embedded in a polystyrene resin.... The sample was placed on top of the dried resin and then the remainder of the resin was poured. [hh]

Although no breach of containment was noted in their 2001 study, WSRC did report that gas generation continued for 60 days after embedding of the sludge in plastic. For this reason, technicians elected to use only fresh samples to “reduce risks of sample breaching.” Evidently, the emission of styrene into the air can occur during sample preparation and for many months following preparation. [hh] We believe the most likely source of the styrene detected by our program was this process at SRS.

A Turning Point?

The end of military nuclear materials production at SRS might have led to the end of operations and the beginning of a comprehensive clean up. Other Defense Department nuclear sites have been shut down and turned to non-defense use. But for a variety of reasons, the old bomb plant on the Savannah River is slated for a host of new projects.

In 1993 production began at the new Replacement Tritium Facility and three years later activity at the F-Canyon was re-started. Also, the Consolidated Incineration Facility and the Defense Waste Processing Facility came on-line during this time. In 2000 SRS was selected by DOE for a plutonium fuel factory, a plutonium pit disassembly and conversion plant, and a plutonium immobilization facility. In 2005 the new Tritium Extraction Facility was completed and now receives materials irradiated in civilian power plants. And SRS is a prime candidate for the new bomb factory, the so-called Complex 2030, which would manufacture pits of plutonium, the triggers for nuclear weapons.

Although some of the new operations at SRS are directed at waste processing—DWPF, Salt Waste Processing facility, etc—many of them signify a return to business-as-usual: the manufacture of nuclear weapons components and weapons-related nuclear fuel. These operations include:

Mixed Oxide Fuel Fabrication Facility: The proposed 41-acre plutonium fuel factory located in the F-Area of SRS would convert 37.5 tons of weapons-grade plutonium into a mixed oxide fuel of uranium and plutonium, increasing radioactive emissions from SRS and increasing the health risk to site personnel and the public. The higher neutron flux of plutonium fuel would cause increased embrittlement of reactor parts, making an accident at electric generating power plants using the fuel more likely. Plutonium fuel has greater quantities of plutonium and other hazardous radioactive isotopes such as Americium 241 and Curium 242, actinide elements which would cause additional harmful radiation exposure to the public during an accident.

Tritium Extraction Facility: Tritium producing rods are being irradiated in Tennessee Valley Authority's nuclear reactors and transported to SRS for purification and shipment to the Defense Department for refurbishing thermonuclear weapons. For the first time, an American civilian nuclear power station is producing essential materials for the nation's nuclear weapons stockpile.

Complex 2030: Plutonium pits were formerly manufactured at Rocky Flats, Colorado, infamous for thirty-five years of unsafe operations and costly accidents resulting in massive radiological contamination. Today, the United States is nowhere near a shortage in plutonium warheads. We have a stockpile of approximately 10,700 warheads plus a huge surplus of 13,000-15,000 plutonium pits. The purpose of the Complex 2030 would be to produce new nuclear weapons, prohibited under the Nuclear Non-proliferation Treaty.

All three projects are ill-conceived. Plutonium fuel would make commercial nuclear

power plants more dangerous and would exacerbate the problem they are intended to solve. The door between military and civilian nuclear programs opened by the plutonium fuel program has been taken off its hinges by the new Tritium Extraction Facility. The proposed Complex 2030 would be as illegal as it is unnecessary.

Conclusion

SOW THE WIND demonstrates that recent and ongoing operations at SRS are having and will continue to have a negative impact on the health of residents in the region. Our investigation centered on the air toxics which are emitted from large and small exhaust stacks at SRS and how they interact to cause excessive downwind pollution levels in the towns of Jackson, New Ellenton, Williston and rural communities. We conclude that the additional burdens which would be created by new facilities at SRS would be an injustice to the people in this area.

The airborne emission of dangerous radionuclides has had and will continue to have a negative impact on the health of people living in the Central Savannah River Area, especially children and the unborn who are particularly vulnerable to radiation. Additional exposure to the region must be reduced and eliminated.

DOE's Accelerated Cleanup and so-called Cleanup Reform Vision at SRS are shortsighted; they are not reform and will not result in a cleanup. The National Academies of Science rightly said:

No plan developed today is likely to remain protective for the duration of the hazards. Instead long-term institutional management requires periodic, comprehensive evaluation of those legacy waste sites still presenting risk to the public and the environment to ensure they do not fall into neglect and that advantage is taken of new opportunities for further remediation. [jj]

Decontamination work was originally predicted to take 40 years, a time equal to the period of weapons production. This estimate was more conservative and may yet prove to be more accurate than the Pollyanna predictions of the DOE's "risk-based end states."

A Vision for the Future

For over half a century, the manufacture of nuclear weapons has sown the wind. The whirlwind of the atomic age has left behind it landscapes scarred with zones of radioactive pollution which will remain dangerous for centuries. Something must now be done to avert the terrible consequences of ignorance, negligence and incompetence.

We must take every opportunity to clean up atomic weapons pollution at the Savannah River Site. Our best minds should be directed in the service of reducing the existing hazards without creating new sacrifice zones in other communities.

Finally, we must halt the construction and operation of new and dangerous weapons plants. An outcry from the people in this region can stem the tide of irresponsible proposals coming from the nuclear industry and its supporters. Resolute, persistent and principled opposition to the merchants of death must guide our campaign.



Louis A. Zeller, Project Director
Blue Ridge Environmental Defense League

AIR MODELING PROTOCOL FOR THIS REPORT

We utilized the US Environmental Protection Agency's SCREEN3 Model in our calculations. The model estimates pollution concentrations from air pollution sources under a wide range of meteorological conditions. SCREEN is a Gaussian plume dispersion model which takes into account the physical factors of each particular air pollution source including emission rate, stack height and diameter, and gas exit velocity and temperature. The model can calculate pollution concentrations from a particular source at discrete distances downwind from an emission point.

The EPA Technology Transfer Network Support Center for Regulatory Atmospheric Modeling states:

Dispersion modeling uses mathematical formulations to characterize the atmospheric processes that disperse a pollutant emitted by a source. Based on emissions and meteorological inputs, a dispersion model can be used to predict concentrations at selected downwind receptor locations. These air quality models are used to determine compliance with National Ambient Air Quality Standards (NAAQS), and other regulatory requirements such as New Source Review (NSR) and Prevention of Significant Deterioration (PSD) regulations. These models are addressed in Appendix A of EPA's *Guideline on Air Quality Models* (also published as Appendix W of 40 CFR Part 51), which was originally published in April 1978 to provide consistency and equity in the use of modeling within the U.S. air quality management system.

The SCREEN3 equation for determining ground-level pollution concentration is:

$$\begin{aligned}
 X = & Q/(2u_s y z) \{ \exp[-\frac{1}{2} ((z_r - h_e)/z)^2] + \exp[-\frac{1}{2} ((z_r + h_e)/z)^2] \\
 & + \sum_{N=1}^k [\exp[-\frac{1}{2} ((z_r - h_e - 2Nz_i)/z)^2] \\
 & + \exp[-\frac{1}{2} ((z_r + h_e - 2Nz_i)/z)^2] \\
 & + \exp[-\frac{1}{2} ((z_r - h_e + 2Nz_i)/z)^2] \\
 & + \exp[-\frac{1}{2} ((z_r + h_e + 2Nz_i)/z)^2]] \}
 \end{aligned}$$

Where:

X = concentration
 Q = emission rate
 u_s = wind speed at stack height
 y = lateral dispersion parameter
 z = vertical dispersion parameter
 z_r = receptor height
 h_e = height of plume centerline above ground
 z_i = mixing height
 k = summation level for multiple reflections of plume off of the ground and elevated inversion, usually 4.

Wind speed in the Aiken-Augusta area averages from 5 to 8 miles per hour, with the high occurring in early Spring and the low in late Summer. A wind rose and wind-speed graph are included on pages 22 and 23 of the report. SCREEN3 uses all stabilities and wind speeds in an iterative process to determine a range of ambient pollution levels downwind of an air emission point.

We have largely adopted a regulatory agency methodology (ref: North Carolina DENR Air Quality Analysis Branch) in developing the protocol used for our assessment.

SCREEN3 inputs are specific for each stack and site location. Most are simple parameters based on physical measurements: source type, stack height and inside diameter, etc. Also, the model asks the user to enter a value for the emission rate in grams per second. For this report, we used the value of 0.126 g/s which corresponds to 1 pound per hour. With this value entered, the SCREEN3 calculates a *generic concentration factor* for each stack which facilitates the use of the pounds per hour data for each air pollutant reported by WSRC. This calculation is explained further below.

There are user options which allow SCREEN3 to adjust to local conditions. Model options selected for this investigation are:

Stack exit velocity: For vertical stacks, the exit velocity is entered. For horizontal stacks or those with rain caps or other deflectors, the formula is $v_i = v_r \sin(\alpha)$ where v_i is velocity to input into the model, v_r is the reported exit velocity, and α is the angle of the stack from horizontal. The minimum recommended input value is 0.01 meters/second.

Ambient air temperature: We used the regulatory default of 293 degrees-K, which is 68 degrees-F.

Receptor height: We used 0 meters to determine ambient pollution at ground level. This is a conservative measure; a receptor height of 1 or 2 meters would gauge pollution concentrations at nose level for children and adults, but we selected zero to rule out local turbulence or other factors.

Urban/rural option: Rural option selected throughout based on land use and population density within SRS and the surrounding areas.

Complex terrain analysis: This option is required when the local topography rises above the top of a 50 meter stack within 20 kilometers. H Canyon and F Canyon are at an elevation of approximately 95 meters ASL and have stacks exceeding 60 meters tall. The DWPF stack in S Area is 45 meters tall and is at an elevation of 86 meters ASL. All three areas are less than 30 kilometers from Aiken, SC: elevation, 160 meters. The complex terrain option is also required for shorter stacks where the terrain exceeds stack height within 5 kilometers. M Area is within one kilometer of SRS boundary and terrain elevation approaches stack height within 6 km. Therefore, the complex terrain analysis was selected and run for these stacks.

Building downwash: Used to determine cavitation effects, elevated pollution concentrations caused by structures downwind of stack emissions. Not enough information was available regarding height, width and orientation of local structures to allow us to make determinations for building downwash. The most severe impacts of building downwash pollution would be on receptors within SRS; i.e., employees and visitors. Subsequent studies will be necessary to measure these impacts.

Using the SCREEN3 model (Version 95250), we calculated a *generic concentration factor* (C_g) at the SRS property line and/or in nearby population centers for each air pollution source. Next, we multiplied the generic concentration factor by the source's *pollutant emission rate* (E_p) to find the *modeled pollutant concentration* (C_m) for each toxic chemical at the property boundary line of SRS.

The formula for the modeled pollutant concentration at SRS is:

$$C_g \times E_p = C_m$$

Where:

C_g = generic concentration factor ($\mu\text{g}/\text{m}^3/\text{lb}/\text{hr}$)

E_p = pollutant emission rate (lb./hour)

C_m = modeled pollutant concentration ($\mu\text{g}/\text{m}^3$)

The following conversion factors are used as needed:

Hourly concentration = $C_m \times 1.0$

24-hour concentration = $C_m \times .4$

Annual concentration = $C_m \times 0.08$

The generic concentration factor was computed for each air pollution source for which we could obtain stack parameters. These parameters were found in the Title V Air Permit application submitted to South Carolina DHEC by Westinghouse Savannah River Company. We also obtained sources' pollutant emission rates from the WSRC Title V permit application. This document is on file at the SC DHEC Bureau of Air Quality in Columbia.

The last step in our protocol was to compare the computer modeled pollutant concentrations to the actual ambient air pollution concentrations obtained from EPA-certified laboratory tests of grab-samples gathered at the SRS plant boundary in 2004 and 2005.

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
 F-SE0015

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P
 ENTER EMISSION RATE (G/S):
 0.126

ENTER STACK HEIGHT (M):
 3.6576

ENTER STACK INSIDE DIAMETER (M):
 0.100584

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):
 DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):
 EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):
 EXAMPLE "VF=1000.00"

0.01
 ENTER STACK GAS EXIT TEMPERATURE (K):
 760.29

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
 293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
 0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
 R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
 N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?
 ENTER Y OR N:

N
 USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?
 ENTER Y OR N:

Y
 ENTER CHOICE OF METEOROLOGY:
 1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)
 2 - INPUT SINGLE STABILITY CLASS
 3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

SKIP--

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
3000.	16.14	6	1.0	1.0	10000.0	1.68	91.92	26.98 NO
3500.	13.08	6	1.0	1.0	10000.0	1.68	105.65	28.98 NO
4000.	10.90	6	1.0	1.0	10000.0	1.68	119.17	30.84 NO
4500.	9.280	6	1.0	1.0	10000.0	1.68	132.50	32.57 NO

5000.	8.039	6	1.0	1.0	10000.0	1.68	145.67	34.21	NO
5500.	7.060	6	1.0	1.0	10000.0	1.68	158.69	35.76	NO
6000.	6.271	6	1.0	1.0	10000.0	1.68	171.58	37.23	NO
6500.	5.624	6	1.0	1.0	10000.0	1.68	184.34	38.65	NO
7000.	5.085	6	1.0	1.0	10000.0	1.68	196.99	40.00	NO
7500.	4.646	6	1.0	1.0	10000.0	1.68	209.54	41.16	NO
8000.	4.270	6	1.0	1.0	10000.0	1.68	221.99	42.28	NO
8500.	3.944	6	1.0	1.0	10000.0	1.68	234.34	43.36	NO
9000.	3.660	6	1.0	1.0	10000.0	1.68	246.61	44.40	NO
9500.	3.411	6	1.0	1.0	10000.0	1.68	258.79	45.41	NO
10000.	3.190	6	1.0	1.0	10000.0	1.68	270.90	46.39	NO
15000.	1.880	6	1.0	1.0	10000.0	1.68	388.43	54.89	NO
20000.	1.327	6	1.0	1.0	10000.0	1.68	500.95	60.30	NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 100. M:
 100. 3235. 6 1.0 1.0 10000.0 1.68 4.09 2.36 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

Y

TO CEASE, ENTER A DISTANCE OF ZERO (0).

 *** SCREEN DISCRETE DISTANCES ***

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

16

TERRAIN HEIGHT > STACK HEIGHT!

TERRAIN HEIGHT HAS BEEN SET = STACK HEIGHT.

USE COMPLEX TERRAIN SCREENING PROCEDURE
 FOR TERRAIN ABOVE STACK HEIGHT.

*** TERRAIN HEIGHT OF 4. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST	CONC	U10M	USTK	MIX HT	PLUME	SIGMA	SIGMA
(M)	(UG/M**3)	STAB	(M/S)	(M/S)	(M)	HT (M)	Y (M) Z (M) DWASH

ENTER DISTANCE (M) (0 TO EXIT):

9470

9470.	3.426	6	1.0	1.0	10000.0	1.02	258.07	45.35	NO
-------	-------	---	-----	-----	---------	------	--------	-------	----

ENTER DISTANCE (M) (0 TO EXIT):

ENTER DISTANCE (M) (0 TO EXIT):

0

CONTINUE SIMPLE TERRAIN DISCRETE CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

```

*****
*** SUMMARY OF SCREEN MODEL RESULTS ***
*****

```

```

CALCULATION   MAX CONC   DIST TO TERRAIN
PROCEDURE     (UG/M**3)  MAX (M)  HT (M)
-----
SIMPLE TERRAIN 3235.     100.    3.

```

```

*****
** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **
*****

```

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

```

***** SCREEN3 MODEL *****
**** VERSION DATED 95250 ****

```

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
F-SE0016

ENTER SOURCE TYPE: P FOR POINT
F FOR FLARE
A FOR AREA
V FOR VOLUME

P
ENTER EMISSION RATE (G/S):
0.126
ENTER STACK HEIGHT (M):
3.6576
ENTER STACK INSIDE DIAMETER (M):
0.100584
ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:
OPTION 1 : EXIT VELOCITY (M/S):
DEFAULT - ENTER NUMBER ONLY
OPTION 2 : VOLUME FLOW RATE (M**3/S):
EXAMPLE "VM=20.00"
OPTION 3 : VOLUME FLOW RATE (ACFM):
EXAMPLE "VF=1000.00"

0.01
ENTER STACK GAS EXIT TEMPERATURE (K):
760.29
ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
293
ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
0
ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
R
CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
N
USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 4.3

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

5

10990

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	PLUME HT ABOVE STK HGT (M)	CONC (UG/M**3)	CONC (UG/M**3)	U10M SC (M/S)	USTK (M)
5.	10990.	.4727E-01	.4727E-01	4.3	.0000	.0	0	.0	.0

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0

0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

2

ENTER MIN AND MAX DISTANCES TO USE (M):

1000

11000

SKIP-----

2800. 17.78 6 1.0 1.0 10000.0 2.68 86.37 25.98 NO
 2900. 16.90 6 1.0 1.0 10000.0 2.68 89.15 26.49 NO
 3000. 16.09 6 1.0 1.0 10000.0 2.68 91.92 26.98 NO
 3500. 13.04 6 1.0 1.0 10000.0 2.68 105.65 28.98 NO
 4000. 10.87 6 1.0 1.0 10000.0 2.68 119.17 30.84 NO
 4500. 9.261 6 1.0 1.0 10000.0 2.68 132.50 32.57 NO
 5000. 8.024 6 1.0 1.0 10000.0 2.68 145.67 34.21 NO
 5500. 7.048 6 1.0 1.0 10000.0 2.68 158.69 35.76 NO
 6000. 6.262 6 1.0 1.0 10000.0 2.68 171.58 37.23 NO
 6500. 5.616 6 1.0 1.0 10000.0 2.68 184.34 38.65 NO
 7000. 5.078 6 1.0 1.0 10000.0 2.68 196.99 40.00 NO
 7500. 4.640 6 1.0 1.0 10000.0 2.68 209.54 41.16 NO
 8000. 4.264 6 1.0 1.0 10000.0 2.68 221.99 42.28 NO
 8500. 3.940 6 1.0 1.0 10000.0 2.68 234.34 43.36 NO
 9000. 3.656 6 1.0 1.0 10000.0 2.68 246.61 44.40 NO
 9500. 3.407 6 1.0 1.0 10000.0 2.68 258.79 45.41 NO
 10000. 3.186 6 1.0 1.0 10000.0 2.68 270.90 46.39 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 1000. M:

1000. 83.25 6 1.0 1.0 10000.0 2.68 33.89 13.96 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

Y

ENTER MIN AND MAX DISTANCES TO USE (M):

11000

12000

 *** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 2. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	U10M (M/S)	MIX HT (M)	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
----------	----------------	-----------	------------	------------	------------	------------	--------------	-------------	-------------	-------

11000.	2.814	6	1.0	1.0	10000.0	2.68	294.90	48.26		NO
--------	-------	---	-----	-----	---------	------	--------	-------	--	----

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 11000. M:

11000. 2.814 6 1.0 1.0 10000.0 2.68 294.90 48.26 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION MAX CONC DIST TO TERRAIN
 PROCEDURE (UG/M**3) MAX (M) HT (M)

 SIMPLE TERRAIN 83.25 1000. 2.

COMPLEX TERRAIN .4727E-01 10990. 5. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

 ***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
 F-SP0023

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P

ENTER EMISSION RATE (G/S):
 0.126

ENTER STACK HEIGHT (M):
 60.96

ENTER STACK INSIDE DIAMETER (M):
 3.048

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

 DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

 EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

 EXAMPLE "VF=1000.00"

15.8496

ENTER STACK GAS EXIT TEMPERATURE (K):

298.53

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 95.2
 DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
 THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
 IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
 THE DISTANCE TO FINAL RISE.
 FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
 CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
 AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

65
 30680

		VALLEY 24-HR CALCS			**SIMPLE TERRAIN 24-HR CALCS**		
TERR HT (M)	MAX 24-HR DIST (M)	PLUME HT CONC (UG/M**3)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK HGT (M)	U10M USTK SC (M/S)
65.	30680.	.1038	.1087E-01	95.2	.1038	33.4	6 1.0 2.7

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
 AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0
 0

COMPLEX TERRAIN CALCULATIONS DONE.
 CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y
 USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?
 ENTER Y OR N:

Y
 ENTER CHOICE OF METEOROLOGY;
 1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)
 2 - INPUT SINGLE STABILITY CLASS
 3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1
 USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y
 ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): NEW ELLENTON

35
 ENTER MIN AND MAX DISTANCES TO USE (M):
 9000
 15000

 *** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 35. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
9000.	.5642	6	1.0	2.7	10000.0	59.32	246.79	45.41 NO

```

9500. .5454   6  1.0  2.7 10000.0 59.32 258.97 46.40 NO
10000. .5275   6  1.0  2.7 10000.0 59.32 271.07 47.35 NO
15000. .3889   6  1.0  2.7 10000.0 59.32 388.54 55.71 NO
ITERATING TO FIND MAXIMUM CONCENTRATION . . .
    
```

```

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 9000. M:
9000. .5642   6  1.0  2.7 10000.0 59.32 246.79 45.41 NO
    
```

```

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?
ENTER Y OR N:
Y
    
```

```

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): AIKEN (2)
61
    
```

```

ENTER MIN AND MAX DISTANCES TO USE (M):
16000
27000
    
```

```

*****
*** SCREEN AUTOMATED DISTANCES ***
*****
    
```

```

*** TERRAIN HEIGHT OF 61. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES
***
    
```

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
16000.	.5341	6	1.0	2.7	10000.0	33.36	411.39	56.86 NO
20000.	.4179	6	1.0	2.7	10000.0	33.36	501.04	61.04 NO
25000.	.3261	6	1.0	2.7	10000.0	33.36	609.82	65.55 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

```

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 16000. M:
16000. .5341   6  1.0  2.7 10000.0 33.36 411.39 56.86 NO
    
```

```

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?
ENTER Y OR N:
N
    
```

```

USE DISCRETE DISTANCES? ENTER Y OR N:
Y
TO CEASE, ENTER A DISTANCE OF ZERO (0).
    
```

```

*****
*** SCREEN DISCRETE DISTANCES ***
*****
    
```

```

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):
14
*** TERRAIN HEIGHT OF 14. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES
***
    
```

DIST	CONC	U10M	USTK	MIX HT	PLUME	SIGMA	SIGMA
------	------	------	------	--------	-------	-------	-------

(M) (UG/M**3) STAB (M/S) (M/S) (M) HT (M) Y (M) Z (M) DWASH

 ENTER DISTANCE (M) (0 TO EXIT):

27110

27110. .1652 6 1.0 2.7 10000.0 80.32 654.81 67.27 NO

ENTER DISTANCE (M) (0 TO EXIT):

0

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION MAX CONC DIST TO TERRAIN
 PROCEDURE (UG/M**3) MAX (M) HT (M)

 SIMPLE TERRAIN .5642 9000. 35.

COMPLEX TERRAIN .1038 30680. 65. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

 ***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):

F-SP0256

ENTER SOURCE TYPE: P FOR POINT

F FOR FLARE

A FOR AREA

V FOR VOLUME

P

ENTER EMISSION RATE (G/S):

0.126

ENTER STACK HEIGHT (M):

34.5948

ENTER STACK INSIDE DIAMETER (M):

0.1524

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

46.57344

ENTER STACK GAS EXIT TEMPERATURE (K):

312.405

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 44.6

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): NEW ELLENTON

38

15550

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	CONC (UG/M**3)	PLUME HT ABOVE STK HGT (M)	U10M SC	USTK (M/S)	
38.	15550.	.3567	.2913E-01	44.6	.3567	10.8	6	1.0	2.0

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): AIKEN

65

30660

65.	30660.	.1192E-01	.1192E-01	44.6	.0000	.0	0	.0	.0
-----	--------	-----------	-----------	------	-------	----	---	----	----

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0

0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

14

ENTER MIN AND MAX DISTANCES TO USE (M):

9000

30000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 14. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	CONC (M/S)	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
9000.	1.440	6	1.0	2.0	10000.0	31.36	246.63	44.51	NO
9500.	1.357	6	1.0	2.0	10000.0	31.36	258.81	45.51	NO
10000.	1.282	6	1.0	2.0	10000.0	31.36	270.92	46.49	NO
15000.	.8065	6	1.0	2.0	10000.0	31.36	388.44	54.97	NO
20000.	.5855	6	1.0	2.0	10000.0	31.36	500.96	60.37	NO
25000.	.4555	6	1.0	2.0	10000.0	31.36	609.76	64.93	NO
30000.	.3706	6	1.0	2.0	10000.0	31.36	715.59	68.90	NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 9000. M:

9000. 1.440 6 1.0 2.0 10000.0 31.36 246.63 44.51 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

ENTER Y OR N:

N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	TERRAIN HT (M)
--------------------------	-----------------------	----------------------------	-------------------

SIMPLE TERRAIN 1.440 9000. 14.

COMPLEX TERRAIN .3567 15550. 38. (24-HR CONC)

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
**** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
H-SP0002

ENTER SOURCE TYPE: P FOR POINT
F FOR FLARE
A FOR AREA
V FOR VOLUME

P

ENTER EMISSION RATE (G/S):

0.126

ENTER STACK HEIGHT (M):

60.96

ENTER STACK INSIDE DIAMETER (M):

3.048

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

19.05

ENTER STACK GAS EXIT TEMPERATURE (K):

298.53

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 97.4

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): AIKEN

66

31090

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	DIST (M)	MAX 24-HR CONC (UG/M**3)	PLUME HT CONC ABOVE STK (UG/M**3)	PLUME HT BASE (M)	PLUME HT CONC ABOVE STK (UG/M**3)	U10M USTK HGT (M)	SC (M/S)
66.	31090.	.1007	.1061E-01	97.4	.1007	35.5 6 1.0 2.7	

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0

0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): NEW ELLENTON

38

ENTER MIN AND MAX DISTANCES TO USE (M):

11000

17000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 38. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M/S)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
11000.	.5055	6	1.0	2.7	10000.0	58.43	295.08	49.31 NO
15000.	.3956	6	1.0	2.7	10000.0	58.43	388.56	55.81 NO

11000. .5055 6 1.0 2.7 10000.0 58.43 295.08 49.31 NO

15000. .3956 6 1.0 2.7 10000.0 58.43 388.56 55.81 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 11000. M:

11000. .5055 6 1.0 2.7 10000.0 58.43 295.08 49.31 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

Y

TO CEASE, ENTER A DISTANCE OF ZERO (0).

 *** SCREEN DISCRETE DISTANCES ***

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): WILLISTON

15

*** TERRAIN HEIGHT OF 15. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M/S)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
24030.	.1766	6	1.0	2.7	10000.0	81.43	588.98	64.82 NO

 ENTER DISTANCE (M) (0 TO EXIT):

24030

24030. .1766 6 1.0 2.7 10000.0 81.43 588.98 64.82 NO

ENTER DISTANCE (M) (0 TO EXIT):

0

ENTER Y OR N:

N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	HT (M)
SIMPLE TERRAIN	.5055	11000.	38.
COMPLEX TERRAIN	.1007	31090.	66. (24-HR CONC)

COMPLEX TERRAIN .1007 31090. 66. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):

H-TP0001

ENTER SOURCE TYPE: P FOR POINT

F FOR FLARE

A FOR AREA

V FOR VOLUME

P

ENTER EMISSION RATE (G/S):

0.126

ENTER STACK HEIGHT (M):

60.96

ENTER STACK INSIDE DIAMETER (M):

3.048

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

4.075176

ENTER STACK GAS EXIT TEMPERATURE (K):

298.53

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 82.7

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): AIKEN

65

31000

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	PLUME HT CONC ABOVE STK (UG/M**3)	PLUME HT CONC ABOVE STK (UG/M**3)	U10M USTK HGT (M)	SC (M/S)
65.	31000.	.1104	.1147E-01	82.7	.1104	21.2 6 1.0 2.7

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROS TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): WILLISTON

14

ENTER MIN AND MAX DISTANCES TO USE (M):

11000

25000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 14. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	CONC (M/S)	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
11000.	.3873	6	1.0	2.7	10000.0	68.17	294.96	48.63	NO
15000.	.3229	6	1.0	2.7	10000.0	68.17	388.47	55.22	NO
20000.	.2596	6	1.0	2.7	10000.0	68.17	500.99	60.60	NO
25000.	.2161	6	1.0	2.7	10000.0	68.17	609.78	65.14	NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 11000. M:

11000. .3873 6 1.0 2.7 10000.0 68.17 294.96 48.63 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 30000. M:

30000. .2424 6 1.0 2.7 10000.0 45.17 715.61 69.10 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

Y

TO CEASE, ENTER A DISTANCE OF ZERO (0).

 *** SCREEN DISCRETE DISTANCES ***

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): NEW ELLENTON

37

*** TERRAIN HEIGHT OF 37. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M/S)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
-------------	-------------------	--------------	---------------	-----------------	-----------------	----------------	----------------	-------

 ENTER DISTANCE (M) (0 TO EXIT):

15880

15880. .4677 6 1.0 2.7 10000.0 45.17 408.59 56.24 NO

ENTER DISTANCE (M) (0 TO EXIT):

0

CONTINUE SIMPLE TERRAIN DISCRETE CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	HT (M)
--------------------------	-----------------------	----------------------------	--------

 SIMPLE TERRAIN .4677 15880. 37.

COMPLEX TERRAIN .1104 31000. 65. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):

H-TP0002

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P
 ENTER EMISSION RATE (G/S):
 0.126
 ENTER STACK HEIGHT (M):
 60.96
 ENTER STACK INSIDE DIAMETER (M):
 2.173224
 ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:
 OPTION 1 : EXIT VELOCITY (M/S):
 DEFAULT - ENTER NUMBER ONLY
 OPTION 2 : VOLUME FLOW RATE (M**3/S):
 EXAMPLE "VM=20.00"
 OPTION 3 : VOLUME FLOW RATE (ACFM):
 EXAMPLE "VF=1000.00"
 10.0584

ENTER STACK GAS EXIT TEMPERATURE (K):
 298.53

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
 293
 ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
 0
 ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
 R
 CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
 N
 USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?
 ENTER Y OR N:
 Y

FINAL STABLE PLUME HEIGHT (M) = 84.4
 DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
 THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
 IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
 THE DISTANCE TO FINAL RISE.
 FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
 CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
 AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): AIKEN
 66
 30930

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**									
TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	PLUME HT CONC ABOVE STK (UG/M**3)	PLUME HT CONC ABOVE STK BASE (M)	PLUME HT CONC ABOVE STK (UG/M**3)	PLUME HT CONC ABOVE STK HGT (M)	U10M USTK SC	(M/S)	
66.	30930.	.1098	.1146E-01	84.4	.1098	22.9	6	1.0	2.7

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROS TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): NEW ELLENTON

38

ENTER MIN AND MAX DISTANCES TO USE (M):

11000

16000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 38. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	U10M (M/S)	USTK (M)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
-------------	-------------------	--------------	---------------	-------------	---------------	-----------------	----------------	----------------	-------

11000.	.6634	6	1.0	2.7	10000.0	45.84	294.97	48.70	NO
--------	-------	---	-----	-----	---------	-------	--------	-------	----

15000.	.4900	6	1.0	2.7	10000.0	45.84	388.48	55.27	NO
--------	-------	---	-----	-----	---------	-------	--------	-------	----

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 11000. M:

11000.	.6634	6	1.0	2.7	10000.0	45.84	294.97	48.70	NO
--------	-------	---	-----	-----	---------	-------	--------	-------	----

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

Y

TO CEASE, ENTER A DISTANCE OF ZERO (0).

*** SCREEN DISCRETE DISTANCES ***

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

15

*** TERRAIN HEIGHT OF 15. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB (M/S)	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
-------------	-------------------	--------------------	---------------	---------------	-----------------	----------------	----------------	-------

ENTER DISTANCE (M) (0 TO EXIT):

24360

24360. .2185 6 1.0 2.7 10000.0 68.84 596.04 64.64 NO

ENTER DISTANCE (M) (0 TO EXIT):

0

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	HT (M)
--------------------------	-----------------------	----------------------------	--------

SIMPLE TERRAIN .6634 11000. 38.

COMPLEX TERRAIN .1098 30930. 66. (24-HR CONC)

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
*** VERSION DATED 95250 ***

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
H-TP0053

ENTER SOURCE TYPE: P FOR POINT
F FOR FLARE
A FOR AREA
V FOR VOLUME

P

ENTER EMISSION RATE (G/S):

0.126

ENTER STACK HEIGHT (M):

15.24

ENTER STACK INSIDE DIAMETER (M):

2.1336

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

9.906

ENTER STACK GAS EXIT TEMPERATURE (K):

298.53

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 38.3

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): SRS A

20

7440

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	CONC (UG/M**3)	PLUME HT ABOVE STK HGT (M)	U10M SC	USTK (M/S)
20.	7440.	1.149	.7515E-01	38.3	1.149	29.0	6	1.0 1.3

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): SRS B

35

11570

35.	11570.	.6974	.4362E-01	38.3	.6974	29.0	6	1.0 1.3
-----	--------	-------	-----------	------	-------	------	---	---------

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): SRS D

18

3130

18.	3130.	2.776	.2234	38.3	2.776	29.0	6	1.0 1.3
-----	-------	-------	-------	------	-------	------	---	---------

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0

0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M): JACKSON

12

ENTER MIN AND MAX DISTANCES TO USE (M):

3000

14000

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH	
3000.	6.361	6	1.0	1.3	10000.0	32.23	92.30	28.22	NO
3500.	5.622	6	1.0	1.3	10000.0	32.23	105.98	30.14	NO
4000.	5.011	6	1.0	1.3	10000.0	32.23	119.46	31.93	NO
4500.	4.501	6	1.0	1.3	10000.0	32.23	132.76	33.61	NO
5000.	4.073	6	1.0	1.3	10000.0	32.23	145.91	35.20	NO
5500.	3.709	6	1.0	1.3	10000.0	32.23	158.91	36.70	NO
6000.	3.397	6	1.0	1.3	10000.0	32.23	171.78	38.14	NO
6500.	3.128	6	1.0	1.3	10000.0	32.23	184.53	39.52	NO
7000.	2.893	6	1.0	1.3	10000.0	32.23	197.17	40.85	NO
7500.	2.691	6	1.0	1.3	10000.0	32.23	209.70	41.99	NO
8000.	2.512	6	1.0	1.3	10000.0	32.23	222.14	43.08	NO
8500.	2.354	6	1.0	1.3	10000.0	32.23	234.49	44.14	NO
9000.	2.213	6	1.0	1.3	10000.0	32.23	246.75	45.17	NO
9500.	2.086	6	1.0	1.3	10000.0	32.23	258.93	46.16	NO
10000.	1.971	6	1.0	1.3	10000.0	32.23	271.03	47.12	NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 3000. M:

3000. 6.361 6 1.0 1.3 10000.0 32.23 92.30 28.22 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

USE DISCRETE DISTANCES? ENTER Y OR N:

N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

```

*****
*** SUMMARY OF SCREEN MODEL RESULTS ***
*****

```

CALCULATION MAX CONC DIST TO TERRAIN
 PROCEDURE (UG/M**3) MAX (M) HT (M)

 SIMPLE TERRAIN 6.361 3000. 12.

COMPLEX TERRAIN 2.776 3130. 18. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
 K-PF0002

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P

ENTER EMISSION RATE (G/S):
 0.126

ENTER STACK HEIGHT (M):
 9.144

ENTER STACK INSIDE DIAMETER (M):
 1.0668

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):

579.915

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 10.3

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): S R S E

10
4810

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	MAX 24-HR DIST (M)	CONC (UG/M**3)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	CONC (UG/M**3)	PLUME HT ABOVE STK HGT (M)	U10M SC	USTK (M/S)
10.	4810.	3.378	.1515	10.3	3.378	2.7	6	1.0

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): JACKSON

12
17680

12.	17680.	.2463E-01	.2463E-01	10.3	.0000	.0	0	.0
-----	--------	-----------	-----------	------	-------	----	---	----

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

5

ENTER MIN AND MAX DISTANCES TO USE (M):

10000

20000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 5. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
10000.	3.155	6	1.0	1.0	10000.0	6.88	270.91	46.41 NO
15000.	1.866	6	1.0	1.0	10000.0	6.88	388.43	54.91 NO
20000.	1.319	6	1.0	1.0	10000.0	6.88	500.95	60.32 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 10000. M:
10000. 3.155 6 1.0 1.0 10000.0 6.88 270.91 46.41 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?
ENTER Y OR N:
N

USE DISCRETE DISTANCES? ENTER Y OR N:
N

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	TERRAIN HT (M)
--------------------------	-----------------------	----------------------------	-------------------

SIMPLE TERRAIN 3.155 10000. 5.

COMPLEX TERRAIN 3.378 4810. 10. (24-HR CONC)

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
*** VERSION DATED 95250 ***

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
K-PF0003

ENTER SOURCE TYPE: P FOR POINT
F FOR FLARE
A FOR AREA
V FOR VOLUME

P
ENTER EMISSION RATE (G/S):
0.126

ENTER STACK HEIGHT (M):

6.858

ENTER STACK INSIDE DIAMETER (M):

1.014984

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):

571.59

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 8.0

DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): SRS E

10

4830

VALLEY 24-HR CALCS **SIMPLE TERRAIN 24-HR CALCS**

TERR HT (M)	DIST (M)	MAX 24-HR CONC (UG/M**3)	PLUME HT CONC (UG/M**3)	PLUME HT ABOVE STK BASE (M)	CONC (UG/M**3)	PLUME HT ABOVE STK HGT (M)	U10M USTK SC	U10M USTK (M/S)
10.	4830.	.1506	.1506	8.0	.0000	.0 0 .0 .0		

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT): JACKSON A

12

17680

12.	17680.	.2463E-01	.2463E-01	8.0	.0000	.0 0 .0 .0		
-----	--------	-----------	-----------	-----	-------	------------	--	--

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.
CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:
Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?
ENTER Y OR N:

Y
ENTER CHOICE OF METEOROLOGY;
1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)
2 - INPUT SINGLE STABILITY CLASS
3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1
USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y
ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

5
ENTER MIN AND MAX DISTANCES TO USE (M):
10000
20000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 5. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
10000.	3.175	6	1.0	1.0	10000.0	4.53	270.91	46.41 NO
15000.	1.874	6	1.0	1.0	10000.0	4.53	388.43	54.91 NO
20000.	1.324	6	1.0	1.0	10000.0	4.53	500.95	60.32 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 10000. M:
10000. 3.175 6 1.0 1.0 10000.0 4.53 270.91 46.41 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?
ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:
N

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	TERRAIN HT (M)
-----	-----	-----	-----

SIMPLE TERRAIN 3.175 10000. 5.

COMPLEX TERRAIN .1506 4830. 10. (24-HR CONC)

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
 M-MP0411

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P

ENTER EMISSION RATE (G/S):
 0.126

ENTER STACK HEIGHT (M):
 15.24

ENTER STACK INSIDE DIAMETER (M):
 0.326136

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):
 DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):
 EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):
 EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):
 347.925

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
 293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
 0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
 R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
 N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?
 ENTER Y OR N:

Y

FINAL STABLE PLUME HEIGHT (M) = 15.6
 DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
THE DISTANCE TO FINAL RISE.

FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

16
5010

		VALLEY 24-HR CALCS			**SIMPLE TERRAIN 24-HR CALCS**		
TERR	MAX 24-HR	PLUME HT	PLUME HT	PLUME HT	PLUME HT	PLUME HT	PLUME HT
HT	DIST	CONC	CONC	ABOVE STK	CONC	ABOVE STK	U10M USTK
(M)	(M)	(UG/M**3)	(UG/M**3)	BASE (M)	(UG/M**3)	HGT (M)	SC (M/S)
16.	5010.	.1430	.1430	15.6	.0000	.0 0 .0	.0

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

18
5260

18.	5260.	.1334	.1334	15.6	.0000	.0 0 .0	.0
-----	-------	-------	-------	------	-------	---------	----

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

18
8200

18.	8200.	.7112E-01	.7112E-01	15.6	.0000	.0 0 .0	.0
-----	-------	-----------	-----------	------	-------	---------	----

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

10

*** TERRAIN HEIGHT OF 10. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST	CONC	U10M	USTK	MIX HT	PLUME	SIGMA	SIGMA
------	------	------	------	--------	-------	-------	-------

```

(M) (UG/M**3) STAB (M/S) (M/S) (M) HT (M) Y (M) Z (M) DWASH
-----
5000. 6.287 6 1.0 1.3 10000.0 5.97 145.67 34.21 NO
5500. 5.528 6 1.0 1.3 10000.0 5.97 158.69 35.76 NO
6000. 4.916 6 1.0 1.3 10000.0 5.97 171.58 37.24 NO
6500. 4.412 6 1.0 1.3 10000.0 5.97 184.34 38.65 NO
7000. 3.992 6 1.0 1.3 10000.0 5.97 196.99 40.00 NO
7500. 3.649 6 1.0 1.3 10000.0 5.97 209.54 41.17 NO
8000. 3.356 6 1.0 1.3 10000.0 5.97 221.99 42.28 NO
8500. 3.101 6 1.0 1.3 10000.0 5.97 234.34 43.36 NO
9000. 2.879 6 1.0 1.3 10000.0 5.97 246.61 44.40 NO
9500. 2.684 6 1.0 1.3 10000.0 5.97 258.79 45.41 NO
10000. 2.511 6 1.0 1.3 10000.0 5.97 270.90 46.39 NO
ITERATING TO FIND MAXIMUM CONCENTRATION . . .

```

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 5000. M:
5000. 6.287 6 1.0 1.3 10000.0 5.97 145.67 34.21 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?
ENTER Y OR N:
N

USE DISCRETE DISTANCES? ENTER Y OR N:
Y
TO CEASE, ENTER A DISTANCE OF ZERO (0).

*** SCREEN DISCRETE DISTANCES ***

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):
4
*** TERRAIN HEIGHT OF 4. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

```

DIST CONC U10M USTK MIX HT PLUME SIGMA SIGMA
(M) (UG/M**3) STAB (M/S) (M/S) (M) HT (M) Y (M) Z (M) DWASH
-----
ENTER DISTANCE (M) (0 TO EXIT):
2810
2810. 12.69 6 1.0 1.3 10000.0 11.97 86.65 26.04 NO

```

ENTER DISTANCE (M) (0 TO EXIT):
0

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:
N

*** SUMMARY OF SCREEN MODEL RESULTS ***

```

CALCULATION MAX CONC DIST TO TERRAIN
PROCEDURE (UG/M**3) MAX (M) HT (M)
-----

```

SIMPLE TERRAIN 12.69 2810. 4.

COMPLEX TERRAIN .1438 4990. 16. (24-HR CONC)

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****

**** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):

M-MP0411 SECOND RUN

ENTER SOURCE TYPE: P FOR POINT

F FOR FLARE

A FOR AREA

V FOR VOLUME

P

ENTER EMISSION RATE (G/S):

0.126

ENTER STACK HEIGHT (M):

15.24

ENTER STACK INSIDE DIAMETER (M):

0.326136

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):

DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):

347.925

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

N

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

N

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS
 3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED
 1

 USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:
 *** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 0. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
2500.	13.49	6	1.0	1.3	10000.0	15.97	77.95	24.43 NO
2600.	12.86	6	1.0	1.3	10000.0	15.97	80.77	24.96 NO
2700.	12.28	6	1.0	1.3	10000.0	15.97	83.57	25.48 NO
2800.	11.74	6	1.0	1.3	10000.0	15.97	86.37	25.99 NO
2900.	11.23	6	1.0	1.3	10000.0	15.97	89.15	26.49 NO
3000.	10.77	6	1.0	1.3	10000.0	15.97	91.92	26.98 NO
3500.	8.926	6	1.0	1.3	10000.0	15.97	105.65	28.98 NO
4000.	7.570	6	1.0	1.3	10000.0	15.97	119.17	30.84 NO
4500.	6.536	6	1.0	1.3	10000.0	15.97	132.50	32.58 NO
5000.	5.725	6	1.0	1.3	10000.0	15.97	145.67	34.21 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 2500. M:
 2500. 13.49 6 1.0 1.3 10000.0 15.97 77.95 24.43 NO

USE DISCRETE DISTANCES? ENTER Y OR N:
 N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:
 N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	TERRAIN HT (M)
--------------------------	-----------------------	----------------------------	-------------------

SIMPLE TERRAIN	13.49	2500.	0.
----------------	-------	-------	----

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****

**** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
N-GE0001

ENTER SOURCE TYPE: P FOR POINT
F FOR FLARE
A FOR AREA
V FOR VOLUME

P

ENTER EMISSION RATE (G/S):
0.126

ENTER STACK HEIGHT (M):
3.6576

ENTER STACK INSIDE DIAMETER (M):
0.0984504

ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:

OPTION 1 : EXIT VELOCITY (M/S):
DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):
EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):
EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):
782.49

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?
ENTER Y OR N:

N

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?
ENTER Y OR N:

N

ENTER CHOICE OF METEOROLOGY;
1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)
2 - INPUT SINGLE STABILITY CLASS
3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:
Y

ENTER MIN AND MAX DISTANCES TO USE (M):
9000
15000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 0. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
9000.	3.643	6	1.0	1.0	10000.0	4.67	246.61	44.40 NO
9500.	3.395	6	1.0	1.0	10000.0	4.67	258.79	45.41 NO
10000.	3.176	6	1.0	1.0	10000.0	4.67	270.90	46.39 NO
15000.	1.874	6	1.0	1.0	10000.0	4.67	388.43	54.89 NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 9000. M:
 9000. 3.643 6 1.0 1.0 10000.0 4.67 246.61 44.40 NO

USE DISCRETE DISTANCES? ENTER Y OR N:
 N

 *** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	HT (M)
SIMPLE TERRAIN	3.643	9000.	0.

 ** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
 **** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
 P-PF0002

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P
 ENTER EMISSION RATE (G/S):
 0.126
 ENTER STACK HEIGHT (M):
 7.62
 ENTER STACK INSIDE DIAMETER (M):
 1.0668
 ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:
 OPTION 1 : EXIT VELOCITY (M/S):
 DEFAULT - ENTER NUMBER ONLY

OPTION 2 : VOLUME FLOW RATE (M**3/S):

EXAMPLE "VM=20.00"

OPTION 3 : VOLUME FLOW RATE (ACFM):

EXAMPLE "VF=1000.00"

0.01

ENTER STACK GAS EXIT TEMPERATURE (K):

532.74

ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):

293

ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):

0

ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):

R

CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:

N

USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?

ENTER Y OR N:

N

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

N

ENTER CHOICE OF METEOROLOGY:

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER MIN AND MAX DISTANCES TO USE (M):

7000

22000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 0. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
-------------	-------------------	--------------	---------------	---------------	-----------------	----------------	----------------	-------

7000.	4.924	6	1.0	1.0	10000.0	10.17	197.00	40.03	NO
7500.	4.507	6	1.0	1.0	10000.0	10.17	209.54	41.20	NO
8000.	4.148	6	1.0	1.0	10000.0	10.17	221.99	42.31	NO
8500.	3.837	6	1.0	1.0	10000.0	10.17	234.35	43.39	NO
9000.	3.566	6	1.0	1.0	10000.0	10.17	246.61	44.43	NO
9500.	3.326	6	1.0	1.0	10000.0	10.17	258.80	45.44	NO
10000.	3.114	6	1.0	1.0	10000.0	10.17	270.91	46.41	NO
15000.	1.848	6	1.0	1.0	10000.0	10.17	388.43	54.91	NO
20000.	1.309	6	1.0	1.0	10000.0	10.17	500.95	60.32	NO

ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 7000. M:

7000. 4.924 6 1.0 1.0 10000.0 10.17 197.00 40.03 NO

USE DISCRETE DISTANCES? ENTER Y OR N:

Y
TO CEASE, ENTER A DISTANCE OF ZERO (0).

*** SCREEN DISCRETE DISTANCES ***

*** TERRAIN HEIGHT OF 0. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	USTK (M/S)	MIX HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
-------------	-------------------	--------------	---------------	---------------	-----------------	----------------	----------------	-------

ENTER DISTANCE (M) (0 TO EXIT):

21000

21000. 1.234 6 1.0 1.0 10000.0 10.17 522.98 61.29 NO

ENTER DISTANCE (M) (0 TO EXIT):

22000

22000. 1.167 6 1.0 1.0 10000.0 10.17 544.87 62.22 NO

ENTER DISTANCE (M) (0 TO EXIT):

23000

23000. 1.107 6 1.0 1.0 10000.0 10.17 566.62 63.13 NO

ENTER DISTANCE (M) (0 TO EXIT):

25000

25000. 1.001 6 1.0 1.0 10000.0 10.17 609.75 64.88 NO

ENTER DISTANCE (M) (0 TO EXIT):

0

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	HT (M)
--------------------------	-----------------------	----------------------------	--------

SIMPLE TERRAIN 4.924 7000. 0.

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

***** SCREEN3 MODEL *****
**** VERSION DATED 95250 ****

ENTER TITLE FOR THIS RUN (UP TO 79 CHARACTERS):
S-DP0007

ENTER SOURCE TYPE: P FOR POINT
 F FOR FLARE
 A FOR AREA
 V FOR VOLUME

P
 ENTER EMISSION RATE (G/S):
 0.126
 ENTER STACK HEIGHT (M):
 44.8056
 ENTER STACK INSIDE DIAMETER (M):
 1.524
 ENTER STACK GAS EXIT VELOCITY OR FLOW RATE:
 OPTION 1 : EXIT VELOCITY (M/S):
 DEFAULT - ENTER NUMBER ONLY
 OPTION 2 : VOLUME FLOW RATE (M**3/S):
 EXAMPLE "VM=20.00"
 OPTION 3 : VOLUME FLOW RATE (ACFM):
 EXAMPLE "VF=1000.00"

25.908
 ENTER STACK GAS EXIT TEMPERATURE (K):
 298.53
 ENTER AMBIENT AIR TEMPERATURE (USE 293 FOR DEFAULT) (K):
 293
 ENTER RECEPTOR HEIGHT ABOVE GROUND (FOR FLAGPOLE RECEPTOR) (M):
 0
 ENTER URBAN/RURAL OPTION (U=URBAN, R=RURAL):
 R
 CONSIDER BUILDING DOWNWASH IN CALCS? ENTER Y OR N:
 N
 USE COMPLEX TERRAIN SCREEN FOR TERRAIN ABOVE STACK HEIGHT?
 ENTER Y OR N:
 Y

FINAL STABLE PLUME HEIGHT (M) = 70.2
 DISTANCE TO FINAL RISE (M) = 151.3

MAXIMUM CONCENTRATIONS ARE EXPECTED TO OCCUR DUE TO PLUME IMPACTION.
 THEREFORE ENTER MINIMUM DISTANCES AND TERRAIN HEIGHTS FOR WHICH
 IMPACTION IS LIKELY, TAKING INTO ACCOUNT TERRAIN CLOSER THAN
 THE DISTANCE TO FINAL RISE.
 FOR TERRAIN BELOW PLUME HEIGHT, SIMPLE TERRAIN AND VALLEY 24-HR
 CALCULATIONS ARE BOTH MADE AND THE MAXIMUM SELECTED.

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),
 AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):
 49
 12940

		VALLEY 24-HR CALCS			**SIMPLE TERRAIN 24-HR CALCS**		
TERR HT (M)	DIST (M)	MAX 24-HR CONC (UG/M**3)	PLUME HT CONC ABOVE STK BASE (M)	PLUME HT CONC ABOVE STK BASE (M)	PLUME HT CONC ABOVE STK HGT (M)	U10M SC	USTK (M/S)
49.	12940.	.3487	.3494E-01	70.2	.3487	26.2	6 1.0 2.3

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M),

AND DISTANCE TO TERRAIN (M) (ZEROES TO EXIT):

0
0

COMPLEX TERRAIN CALCULATIONS DONE.

CONTINUE WITH SIMPLE TERRAIN CALCULATIONS? ENTER Y OR N:

Y

USE SIMPLE TERRAIN SCREEN WITH TERRAIN ABOVE STACK BASE?

ENTER Y OR N:

Y

ENTER CHOICE OF METEOROLOGY;

1 - FULL METEOROLOGY (ALL STABILITIES & WIND SPEEDS)

2 - INPUT SINGLE STABILITY CLASS

3 - INPUT SINGLE STABILITY CLASS AND WIND SPEED

1

USE AUTOMATED DISTANCE ARRAY? ENTER Y OR N:

Y

ENTER TERRAIN HEIGHT ABOVE STACK BASE (M):

11

ENTER MIN AND MAX DISTANCES TO USE (M):

10000

14000

*** SCREEN AUTOMATED DISTANCES ***

*** TERRAIN HEIGHT OF 11. M ABOVE STACK BASE USED FOR FOLLOWING DISTANCES

DIST (M)	CONC (UG/M**3)	U10M STAB	CONC (M/S)	U10M MIX	HT (M)	PLUME HT (M)	SIGMA Y (M)	SIGMA Z (M)	DWASH
10000.	.6109	6	1.0	2.3	10000.0	60.00	271.01	46.98	NO

10000. .6109 6 1.0 2.3 10000.0 60.00 271.01 46.98 NO
ITERATING TO FIND MAXIMUM CONCENTRATION . . .

MAXIMUM 1-HR CONCENTRATION AT OR BEYOND 10000. M:

10000. .6109 6 1.0 2.3 10000.0 60.00 271.01 46.98 NO

CONTINUE SIMPLE TERRAIN AUTOMATED CALCS WITH NEW TERRAIN HEIGHT?

ENTER Y OR N:

N

USE DISCRETE DISTANCES? ENTER Y OR N:

N

DO YOU WISH TO MAKE A FUMIGATION CALCULATION? ENTER Y OR N:

N

*** SUMMARY OF SCREEN MODEL RESULTS ***

CALCULATION PROCEDURE	MAX CONC (UG/M**3)	DIST TO TERRAIN MAX (M)	TERRAIN HT (M)
-----	-----	-----	-----

SIMPLE TERRAIN .6109 10000. 11.

COMPLEX TERRAIN .3487 12940. 49. (24-HR CONC)

** REMEMBER TO INCLUDE BACKGROUND CONCENTRATIONS **

DO YOU WANT TO PRINT A HARDCOPY OF THE RESULTS? ENTER Y OR N:

Savannah River Site Emission Point Stack Parameters for SCREEN3 (Data From Title V Permit Application)

EMISSION POINT	HEIGHT	DIAMETER	TEMP	VELOCITY	DISCHARGE	UTM-E	UTM-N	DISTANCE	HPY	CONTROL	DESCRIPTOR	CAPACITY	SOURCE	STACK BASE ASL	STACK HT ASL
F-SE0015 metric	12 3.6576	0.33 0.100584	910 760.29	0.0325 0.009906	R	437046.68	3683090.9	30384.8 9261.28704	8760		DIESEL GENERATOR	135402 GPY, 200 KW	254-5F	96	99.7
F-SE0016 metric	12 3.6576	0.33 0.100584	910 760.29	0.0325 0.009906	R	437058.5	3683099.5	30839.1 9399.75768	8760		DIESEL GENERATOR	135402 GPY, 200 KW	254-5F	95	98.6
F-SP0023 metric	200 60.96	10 3.048	78 298.53	52 15.8496	na	437031.684	3683049.02	30801.9 9388.41912	8760		F CANYON			95	156
F-SP0256 metric	113.5 34.5948	0.5 0.1524	103 312.405	152.8 46.57344	NA	436885.78	3683052.54	30324.6 9242.93808	8760		F CANYON			95	129.6
H-SP0002 metric	200 60.96	10 3.048	78 298.53	62.5 19.05	NA	440448.08	3683228.7	37807.5 11523.726			H CANYON			94	155

Savannah River Site Emission Point Stack Parameters for SCREEN3 (Data From Title V Permit Application)

EMISSION POINT	HEIGHT	DIAMETER	TEMP	VELOCITY	DISCHARGE	UTM-E	UTM-N	DISTANCE	HPY	CONTROL	DESCRIPTOR	CAPACITY	SOURCE	STACK BASE ASL	STACK HT ASL
H-TP0001 metric	200 60.96	10 3.048	78 298.53	13.37 4.075176	NA	440021.68	3683257.87	37380.5 11393.5764			H CANYON		232-H	95	156
H-TP0002 metric	200 60.96	7.13 2.173224	78 298.53	33 10.0584	NA	440013.181	3683332.73	37135.14 11318.79067			H CANYON		232-H	94	155
H-TP0053 metric	50 15.24	7 2.1336	255.24	32.5 9.906	NA	439789.83	3683385.32	37326 11376.9648			H CANYON		232-H	85	100.2
K-PF0002 metric	30 9.144	3.5 1.0668	585 579.915	0.0325 0.009906	R	438357.157	3674511.29	29646.59 9036.280632	8760	UNCONTR OLLED	P-BOILER-1		184-10K	85	94.1
K-PF0003 metric	22.5 6.858	3.33 1.014984	570 571.59	0.0325 0.009906	R	438358.93	3674503.15	29653.07 9038.255736	8760	UNCONTR OLLED	P-BOILER-2		184-10K	85	91.9

Savannah River Site Emission Point Stack Parameters for SCREEN3 (Data From Title V Permit Application)

EMISSION POINT	HEIGHT	DIAMETER	TEMP	VELOCITY	DISCHARGE	UTM-E	UTM-N	DISTANCE	HPY	CONTROL	DESCRIPTOR	CAPACITY	SOURCE	STACK BASE ASL	STACK HT ASL
M-MP0411 metric	50 15.24	1.07 0.326136	167 347.925	0.0325 0.009906	R	431348.22	3688520.4	2662.135 811.418748	8760	HEPA+BA G	VITRIFICATION	2738 TPY	341-8M	116	131.2
N-GE0001 metric	12 3.6576	0.323 0.0984504	950 782.49	0.0325 0.009906	R	438536.91	3678876.95	35301.02 10759.7509	2000		GENERATOR	190KW		96	99.7
P-PF0002 metric	25 7.62	3.5 1.0668	500 532.74	0.0325 0.009906	R	portable		24851 7574.5848	8760		P-BOILER	20.4MMBTU/H	183-3P	103	110.6
S-DP0007 metric	147 44.8056	5 1.524	78 298.53	85 25.908	NA	440271.055	3683796.52	35857.16 10929.26237	8760	BH,S,C	DWPF			86	130.8

October 31, 2001

MEMORANDUM

SUBJECT: USEPA Region 9 Summary of Quality Assurance Planning for the "Bucket Brigade" Community Air Sampling Project, Contra Costa County, California

FROM: Mathew C. Plate, Environmental Scientist
Quality Assurance Office, PMD-3

THROUGH: Vance S. Fong, P.E., Manager
Quality Assurance Office, PMD-3

TO: Jean Circiello, Children's Health Coordinator
Office of Strategic Planning and Emerging Issues, SPE-1

In 1998 USEPA Region 9 funded a community air sampling project in Contra Costa County California. The project was called the "Bucket Brigade" Community Air Sampling Project (Bucket Brigade). A quality assurance project plan (QAPP, September 1998) detailing project objectives, sample collection, quality assurance, data use, and data interpretation activities, was prepared by Contra Costa Health Services, Communities for a Better Environment, and other members of the Regional Accident Prevention Coalition. The USEPA Region 9 QA Office assisted the Bucket Brigade in developing a quality system to meet project objectives. The QAPP detailing this quality system was approved by USEPA Region 9. It is the responsibility of the Bucket Brigade to ensure proper implementation of this QAPP. USEPA Region 9 has not performed audits of the Bucket Brigade program, tracked compliance with the Bucket Brigade QAPP, or performed data quality review on Bucket Brigade data.

Contra Costa County, located in the San Francisco Bay Area, has a significant number of refineries and other large industrial facilities. Periodically, there are unintentional releases of chemicals from facilities in Contra Costa County. In the past these releases have been self reported by facilities and have generated odor and occasional health complaints from nearby residential areas. The Bucket Brigade is a sampling and analytical program which enables members of the community to collect environmental information during chemical releases. The sample collection device used by the Bucket Brigade is a five-gallon plastic bucket modified to serve as a negative pressure Tedlar bag collection device. The air samples collected into Tedlar bags are analyzed by routine USEPA analytical methods for ambient air.

The Bucket Brigade QAPP, approved by USEPA Region 9, indicates that the project is for a "Pilot Program." The main technical objective of the project is to produce data of sufficient quality to "provide the community and the County with more information about chemicals in the air than is currently available." The Bucket Brigade QAPP establishes a program which provides data of sufficient quality meet this objective by adaptation of an established sampling technique, use of established analytical methods, quality control (QC) checks, and a data review and qualification process.

To expand to use of Bucket Brigade data beyond the objective of the 1998 QAPP, there are mechanisms to improve and/or better understand the quality of the Bucket Brigade data. The

following areas of concern and how they are addressed by the Bucket Brigade QAPP should be noted when considering additional uses for Bucket Brigade data (these areas are given as examples and not intended to be comprehensive).

* The sampling design for any given incident may have insufficient spacial and temporal coverage, and therefore may not be representative of a worst case exposure.

This concern could be partially mitigated by collection of multiple, coordinated samples and by the use of air modeling techniques. USEPA Region 9 is unaware what steps the Bucket Brigade has taken to this end. However, safety concerns and common sense would preclude representative bucket sampling in areas under a "shelter in place" or evacuation order.

* The Tedlar bag and bucket sampler storage conditions in the field are not well controlled and could lead to unintended contamination.

This concern has been partially mitigated by the Bucket Brigade's submission of unused Tedlar bags stored and shipped along side "incident" samples to the laboratory for chemical analysis (field blanks).

* Community members are not accustomed to field sampling.

The Bucket Brigade has a sampling manual and training that can be given to community samplers.

* Some chemical species are not stable or cannot be recovered from Tedlar bags.

This is not well controlled. QA could be improved by verifying the stability of tested chemicals in Tedlar bags.

* There may be laboratory problems with the data collected.

This has been partially controlled for by running laboratory split samples which are analyzed by the USEPA Region 9 laboratory. However, for some data uses, it is necessary to also conduct laboratory audits and validation of "raw" laboratory data.

The Bucket Brigade program as developed in the QAPP provides limited information, not readily available from other sources, about airborne chemicals potentially associated with accidental releases. This data may be valuable to facilities and governmental agencies concerned with protecting public health and the environment.

Questions or comments regarding this review should be referred to me at (415) 972-3799.

Annotated Bibliography of Data Sources

- Alliance for Nuclear Accountability, *Danger Lurks Below: The Threat to Major Water Supplies from US Department of Energy Nuclear Weapons Plants*, April 2004, Page 105.** Detailed the deficiencies in DOE environmental management programs at all US nuclear weapons sites. Reported SRS is located over the greatest water recharge area on the east coast. Prepared by Radioactive Waste Management Associates and supported by a grant from the Citizens Monitoring and Technical Assessment Fund. Released to the general public.
- Duke Cogema Stone & Webster, *Mixed Oxide Fuel Fabrication Facility Environmental Report, Rev 1&2, Figure 4-13*, U. S. Department of Energy Contract DE-AC02-99-CH10888.** Reported on environmental impacts of the proposed plutonium fuel factory at the Savannah River Site. Done by principal contractor for MFFF project. Provided annual and seasonal wind rose for direction and speed of wind at the Savannah River Site.
- Georgia Department of Natural Resources Environmental Protection Division *Environmental Radiation Surveillance Report 2000-2002, Published March 2004.*** Measured state radiation levels near nuclear reactors and Savannah River Site. Anticipates continued emissions of radioactive pollutants from the Savannah River Site by ongoing activities. Predicts the production of tritium will likely result in increased airborne H-3 releases to the off-site environment. Written by state environmental specialists with assistance from utilities, academia, SRS, WSRC, DOE and others. Public record generally available.
- Mahoney, MJ and d'Entremont PD, *Interim Salt Processing Strategy Planning Baseline, Revision 0* (CBU-PED-2004-00027), August 27, 2004.** Studied high-level radioactive waste tank processing at SRS. Cited in *Basis for Section 3116 Determination for Salt Waste Disposal at the Savannah River Site* (DOE-WD-2005-001) that SRS has generated over 140 million gallons of highly radioactive liquid waste laced with a mixture of salts, acids, metals and solvents.
- National Research Council of the National Academy of Science, *Long-Term Institutional Management of US DOE Legacy Waste Sites*, August 2000.** Examined U.S. Department of Energy plan for transition from active waste site management and remediation to what the DOE terms “long-term stewardship.” Argued that a broader and more systematic approach is needed.
- The Radioactivist Campaign, *Under A Cloud-Fallout from the Savannah River Site*, Norm Buske, October 2003.** Found evidence of releases of radioactivity into the environment which have contaminated areas outside of SRS. Supported by a grant from the Citizens Monitoring and Technical Assessment Fund. Authored by Norm Buske, The Radioactivist Campaign’s research expert.

Risk Assessment Corporation, *The Savannah River Site Dose Reconstruction Project Phase II: Source Term Calculation and Ingestion Pathway Data Retrieval* (Report No. 1-CDC-SRS-1999-Final) Submitted to Centers for Disease Control and Prevention (Contract No. 200-95-0904), p. 4.1-28, p. 4.1-27 April 30, 2001. Recorded historical evidence of radioactive and toxic emissions from SRS for the Centers for Disease Control. Studied releases, doses and risks to members of the public living offsite. Described history of nuclear and chemical operations at SRS. Compiled technical data not previously released to the public domain.

South Carolina Department of Health and Environmental Control; Savannah River Site Part 70 Air Quality Permit (No. TV-0080-0041); Final draft January 23, 2002. Issued by the SC DHEC Bureau of Air Quality under SC Pollution Control Act, Sections 48-1-50(5) and 48-1-110(a) and the 1976 Code of Laws of SC— Regulation 61-62. Required by Title V of the federal Clean Air Act and Amendments. Based on information submitted by the contractor: Westinghouse Savannah River Company for the US Department of Energy. Used by state air quality agency and facility operator to determine compliance with all applicable federal and state air quality standards. Contains detailed descriptions of operations. Stipulates applicable emission limits, specific emission requirements, monitoring and reporting requirements, and any additional conditions.

United States Department of Energy, *Savannah River Site Environmental Reports 1998—2006* (Publication Nos. WSRC-TR-98-00312, WSRC-TR-99-00299, WSRC-TR-2004-00015, WSRC-TR-2005-00005 and WSRC-TR-2006-00007); Westinghouse Savannah River Company, Savannah River Site, Aiken, SC 29808. Published annually the Department of Energy at the Savannah River Site. Prepared by the facility's principal contractor Westinghouse Savannah River Company under US DOE guidance. Contains information about SRS environmental monitoring programs, dose estimates, waste management activities and research projects. Distributed to the Site Specific Advisory Board, federal, state and local officials, stakeholders and the general public.

United States Department of Energy, Savannah River Operations Office, *1996 Baseline Environmental Management Report*, Posted 08/19/1996, downloaded September 2005 at <http://web.em.doe.gov/bemr96/scarol.html> Catalogued the massive cleanup necessary for the nation's defense sites. Published baseline information on polluted areas which estimated that SRS had over 1,000 facilities which were potentially contaminated with hazardous and radioactive materials. Estimated total cost of Savannah River Site characterization, remediation, maintenance, deactivation and disposition from 1996 through 2050 would exceed \$48 billion. No longer available on DOE website.

United States Department of Energy; Savannah River Site Part 70 Air Permit Application; Prepared for USDOE by Westinghouse Savannah River Company (Control Contract No. DE-AC09-89SR18035); Volumes I—XVIII

Prepared by WSRC for DOE pursuant to federal Clean Air Act Title V. Lists all air emission sources at SRS including major, minor and insignificant sources. Catalogs specific information for each source including elevation, geographic coordinates, stack height and diameter, exit velocity and temperature, and quantities of pollutants emitted.

United States Department of Energy, *Basis for Section 3116 Determination for Salt Waste Disposal at the Savannah River Site (DOE-WD-2005-001), February 28, 2005.* Issued pursuant to Section 3116 of the Ronald Reagan National Defense Authorization Act for Fiscal Year 2005. Authorized the Department of Energy and the Nuclear Regulatory Commission to approve disposal of radioactive salt waste at SRS utilizing Caustic Side Solvent Extraction and Salt Waste Processing Facility. Declared that high-level radioactive waste resulting from re-processing would now be designated “incidental” waste and that above ground storage or burial in a deep repository is no longer required. Applies to such wastes only in South Carolina and Idaho.

United States Department of Energy, Savannah River Operations Office, *Savannah River Site End State Vision Document, July 26, 2005, p. 50, 52, 56, 63, 65, 73.* Incorporated comments and documents into a guide for future decision-making for so-called end states; i.e., goals of environmental remediation and management programs at SRS. Includes a comprehensive overview of current conditions at SRS. Compiled information from SRS stakeholders including South Carolina Dept. of Health and Environmental Control, US EPA, Dept. of Energy and the public. Written in technical language but understandable to the general reader.

United States Geological Survey, *Groundwater Levels, Predevelopment Groundwater Flow, and Stream Aquifer Relations in the Vicinity of the Savannah River Site, Georgia and South Carolina, (97-4197) Water Resources Investigations Report, Clarke JS and West TW, 1997, Page 104.* Surveyed 5,147 square mile Central Savannah River Area in an extensive aquifer study. Prepared in cooperation with the US DOE, Georgia Dept. Natural Resources, Georgia Geological Survey. Found underground water flows from SRS into Georgia.

United States Geological Survey, *Ground-Water Flow Study in the Vicinity of the Savannah River Site, South Carolina and Georgia (Fact Sheet FS-178-95), John S. Clarke, August 1995, downloaded April 2006 from USGS Atlanta, GA website at http://ga.water.usgs.gov/publications/fs178_95/fs178_95.html* Studied underground water migration to determine if trans-flow of contamination from SRS could cross Savannah River to reach Georgia. Initiated testing. Listed variety of radionuclides, heavy metals and toxic chemicals known to leak from various facilities at SRS.

Westinghouse Savannah River Company, *D-Area Drip Irrigation-Phytoremediation Project: SRTC Final Report (WSRC-TR-2002-00080) Wilde EW et al, January 2003, Prepared for the US Department of Energy under Contract No. DE-AC09-96SR18500.* Reported on D-Area chlorinated organic solvent contamination of soil and groundwater and tested methods of clean-up. Intended for scientific community and DOE agencies involved in environmental remediation. Provided evidence regarding the extent of solvent contamination at SRS.

Westinghouse Savannah River Company, *Land Use Control Assurance Plan for the SRS (WSRC-RP-98-4125), Updated January 12, 2002 Revision.1.1, Page 3.* Detailed plan for prospective uses of SRS. Included complete maps of SRS watersheds, marked with industrial areas both nuclear and non-nuclear.

Westinghouse Savannah River Company, *Determination of Uranium and Mercury Speciation in High Level Waste Tank 8F and 11H Sludge (WSRC-TR-2001-00428, Rev. 0) Duff MC et al, 9/24/01.* Used synchrotron-based X-ray absorption spectroscopy and other techniques to characterize metal speciation in waste tank sludge. Reported that HLW sludge samples are embedded in polystyrene (vinyl benzene) for transport. Indicated gas generation from samples persisted for 60 days.

